
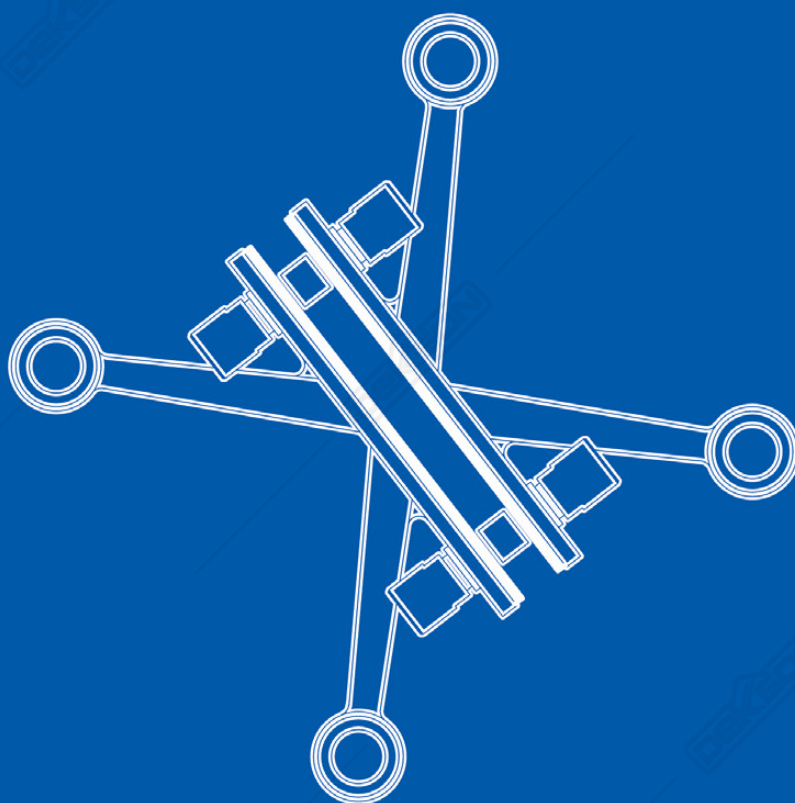
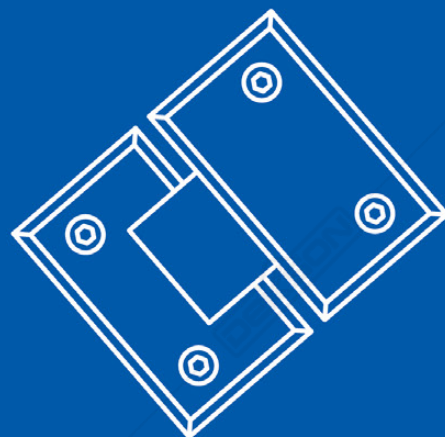


BROCHURE

Accessories for
GLASS

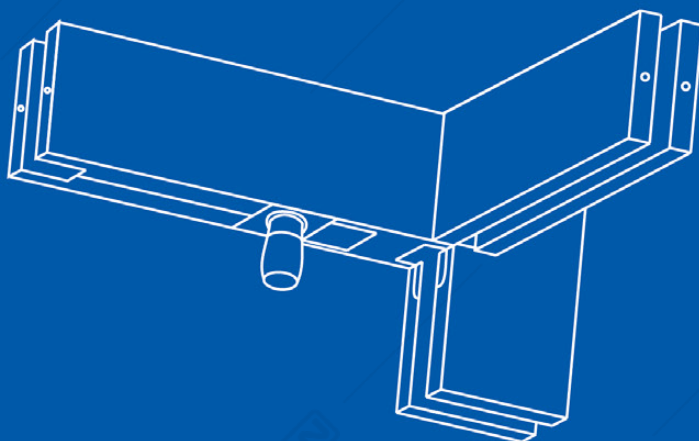

A modern office interior featuring glass partitions and doors. The space is bright and open, with a light-colored wooden floor and a white ceiling. In the background, there is a large window looking out onto a cityscape. A beige sectional sofa is visible on the left, and a round table with four chairs is on the right. A large green plant is in the foreground on the right.

THE NEW MODERN LIFESTYLE OF GLASS **ACCESSORIES**

Dekkson glass door accessories provide high quality mechanism and years of warranty, ensuring an ongoing smooth operation. From the most private areas at your shower room to public areas, glass door inspires professionalism, transparency and prestige. Dekkson accessories is the perfect choice to support any kind of glass doors.

Table of Contents :

Glass Door

03

- 3 Hydraulic Patch Fitting
- 4 Patch Fitting
- 6 Floor Spring
- 8 Spider Fitting
- 14 Automatic Sliding Door
- 15 Sliding Glass Telescopic
- 17 Sliding Magtec
- 18 Hydraulic Soft Closer
- 19 Sliding Glass Door
- 21 Slide & Fold Glass Door
- 22 Pull Handle
- 24 Door Knob
- 25 Sliding Glass Lock & Glass Door Lock

Shower Door

29

- 29 Shower Hinge
- 36 Sliding Shower

Other Glass Accessories

40

- 40 Cubical System for Toilet / Shower
- 41 Cubical Toilet & Glass Holder
- 42 Glass Holder & Glass Clip
- 45 Advertising Fitting
- 47 Staircase Railing
- 49 Mohair
- 50 Clip Seal
- 51 Glass Suction
- 52 Silicone
- 54 Silicone Sausage & Silicone gun


DEKSON reserves the rights to change the design & technical specifications of the products or to make additions or improvements without any notification. If you must form a complete sets for engineering. Please contact the local distributor or our company to inquire about the accurate sizes, or measure according to the sizes of the object itself.

HYDRAULIC PATCH FITTING

Automatic Self-Closing Technology


Hydraulic patch fitting adds a convenient automatic self-closing function to your interior glass door. Hydraulic patch fitting is best used for indoor areas.

MATERIAL : COVER PLATE STAINLESS STEEL SUS 304





PTH 1080 PSS

Glass Thickness : 8 mm ~ 12 mm
Door Width : 800 mm (Max.)
Door Weight : 80 kg (Max.)
Self-closing when door is closed at 80°
☀ +40° c ❄ -15° c

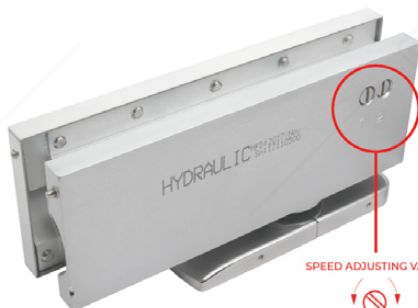

SPEED ADJUSTING VALVE

Fast Slow
NO 1 : CLOSING SPEED
NO 2 : LATCHING SPEED



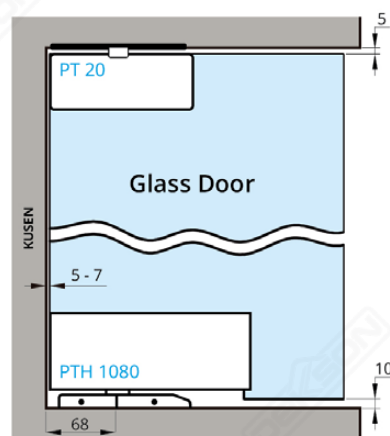


Tebal Kaca
8-13





PTH 1100 PSS

Glass Thickness : 8 mm ~ 13 mm
Door Width : 1000 mm (Max.)
Door Weight : 100 kg (Max.)
Self-closing when door is closed at 80°
☀ +40° c ❄ -15° c

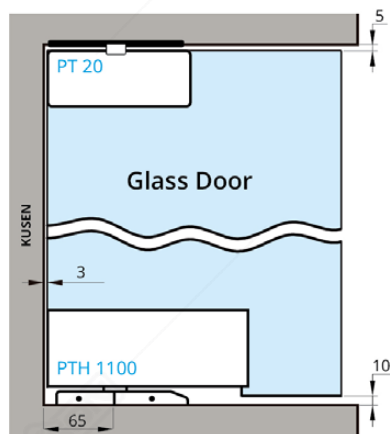


Angle Adjustment Instruction

1. Unfasten all 6 screws (1, 2, 3, 4, 5, 6) using M5 Allen Key
2. Adjust the angle, then fasten all 6 screws (1, 2, 3, 4, 5, 6) tightly



PATCH FITTING

MATERIAL : STAINLESS STEEL SUS 304

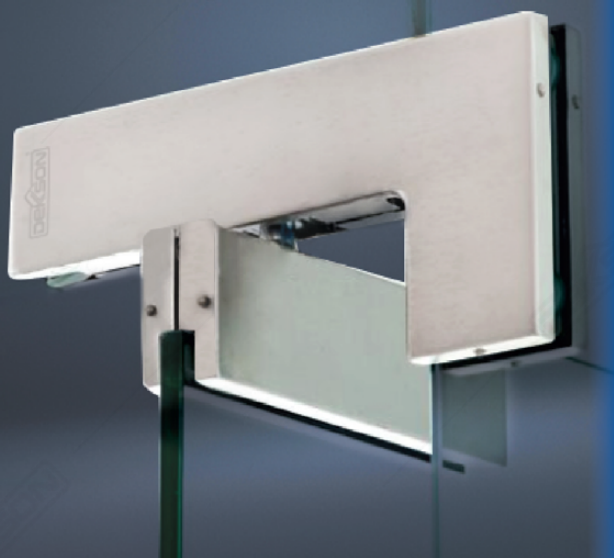

PT 10 PSS

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

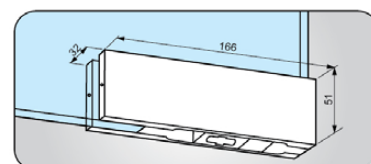

PT 20 PSS

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

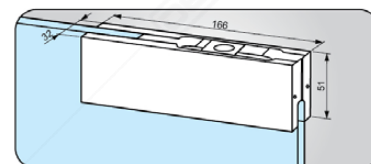

PT 30 PSS

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

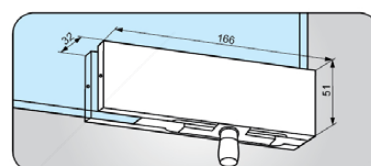

PT 40 PSS

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

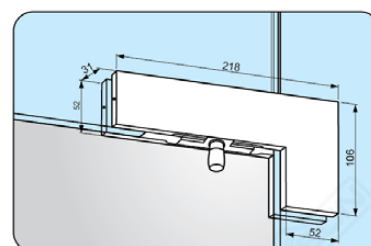

PT 24 PSS



Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL




GUN METAL

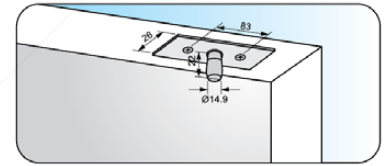

PT 24 HD SSS

HEAVY DUTY

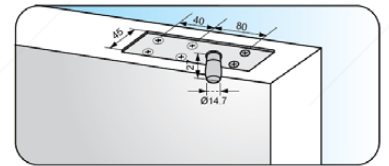

US 10 PSS

*Cylinder to be ordered separately

Available :



MATT BLACK




MATT TITANIUM



BLACK PEARL



GUN METAL

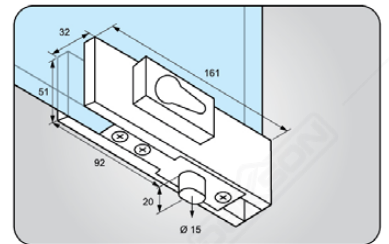


PT 41 PSS LEFT

*Available in : Right

Available :





MATT BLACK

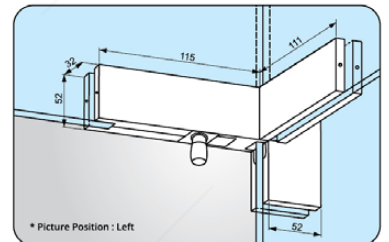

* Picture Position : Left

ILLUSTRATIONS

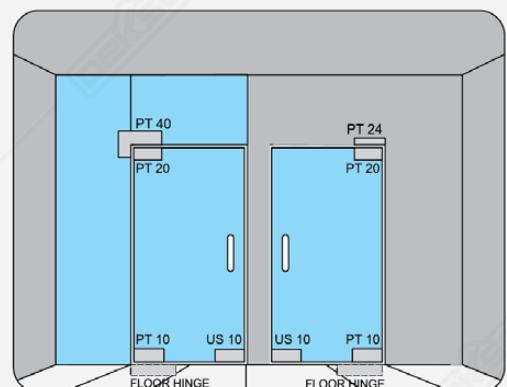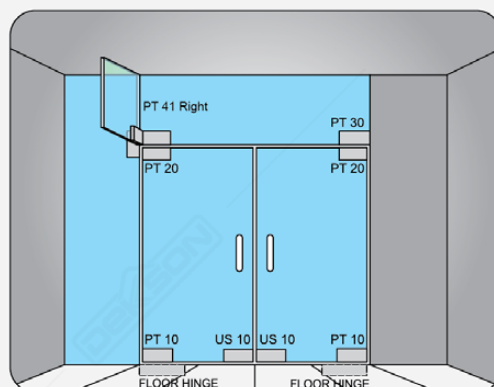

FLOOR SPRING

Certified for Optimum Operation

Floor Spring is the backbone of glass door in public facilities. Floor Spring has to withstand forces of natures such as wind, rain and storm, as well as performing hundreds to thousands of opening and closing movement everyday.

Dekkson floor spring is up to these tasks and its quality mechanism has been certified by PSB Singapore.



MATERIAL : COVER PLATE STAINLESS STEEL SUS 304



FH 84 BLACK PEARL

Available : SSS

TITANIUM
GUN METAL
MATT BLACK

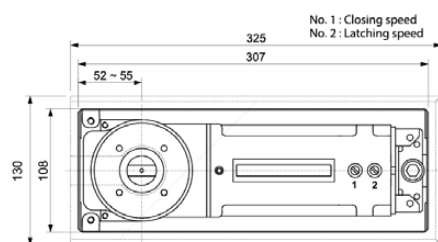

SPECIFICATION :

Type	Size	Door Weight [Max]	Door Width [Max]
FH 211 SSS	-	80 Kg	800 mm
FH 84 SSS	-	-	-
FH 84 BD SSS	Normal	100 Kg	900 mm
FH 84 BD SSS w/o spindle	-	-	-
FH 8400 SSS	Normal	100 Kg	1000 mm
FH 84 BD SSS	4	120 Kg	1100 mm
FH 75 SSS	-	150 Kg	1200 mm
FH 75 BD SSS	-	-	-
FH 80 SSS	-	300 Kg	1500 mm
FH 80 BD SSS	-	-	-

Accessories For Glass



FH 84 BD SSS (Body Only)




FH 84 BD SSS (w/o Spindle)


SPINDLE



SPINDLE 3+10MM
W/O FH 84+FH 80 SSS



SPINDLE 3+15MM
W/O FH 84+FH 80 SSS



COMPATIBLE FOR FH 84 BD SSS W/O SPINDLE & FH 80 SSS
* SPINDLE CAN BE ORDER SEPARATELY

SPIDER FITTING

Formidable Support for Glass Structures



Glass structure as building exterior is an increasingly popular design trend. Dekkson spider fitting products is manufactured from high quality materials to ensure the safety and stability of glass structures. Dekkson spider fitting set can hold glass sheets that weighed up to 220 kilograms each.

MATERIAL : STAINLESS STEEL SUS 304



160 SERIES





SF 8211
160MM SSS





SF 8212
160MM SSS




SF 8213
160MM SSS

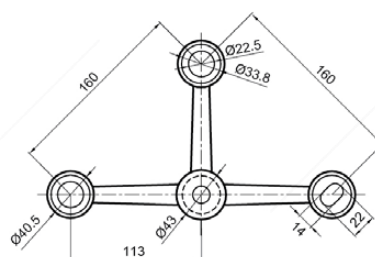


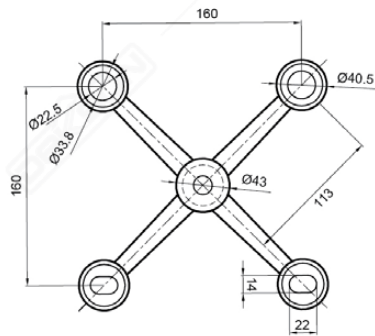

SF 8214
160MM SSS

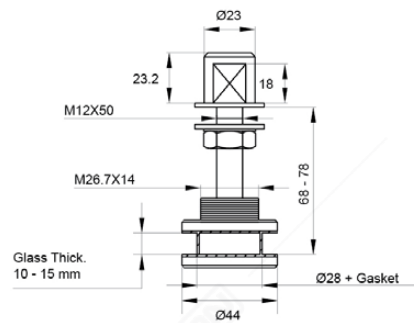

SF 8241
160MM (ROUTE) SSS



SF 8245
160MM (BASE) SSS
Material : Stainless Steel SUS 304 + Iron

220 SERIES




ILLUSTRATIONS

160 SERIES



Capacity max : 170 Kg/ Glass sheet
Glass Thickness : 10 - 15 mm

220 SERIES



Capacity max : 220 Kg/ Glass sheet
Glass Thickness : 10 - 25 mm

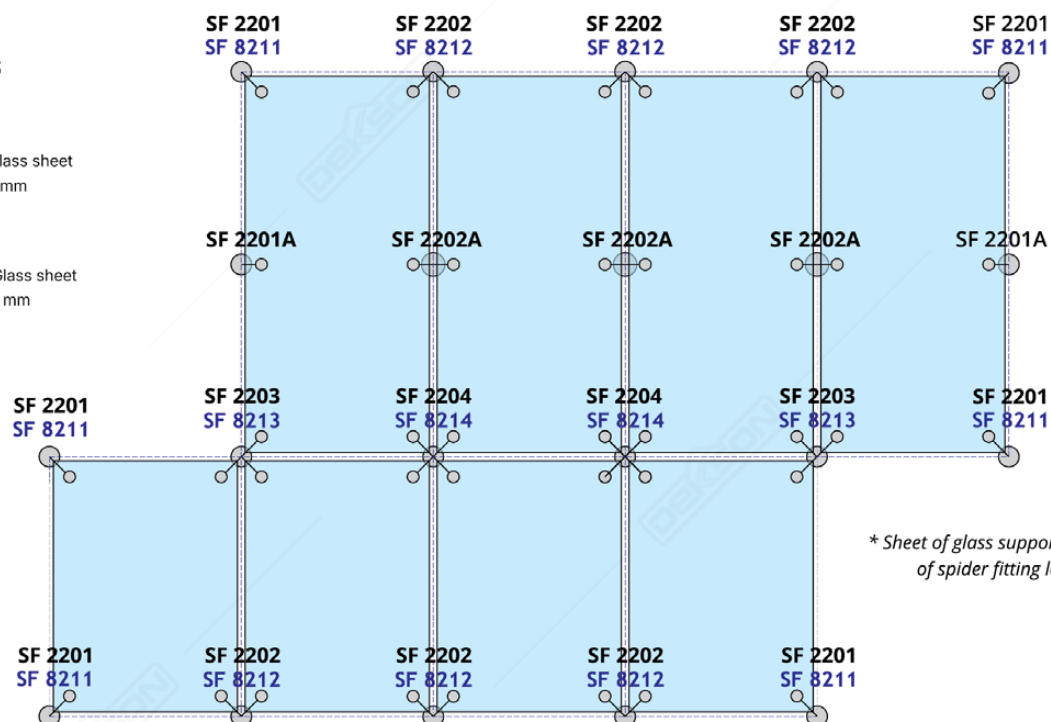



SF 2201
220MM SSS






SF 2201A
220MM SSS





SF 2202 (90)
220MM SSS




SF 2202A (180)
220MM SSS

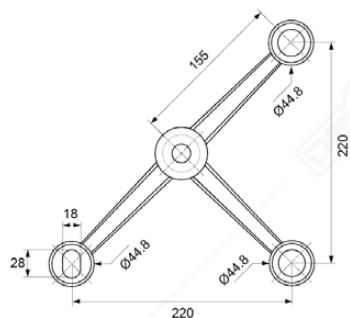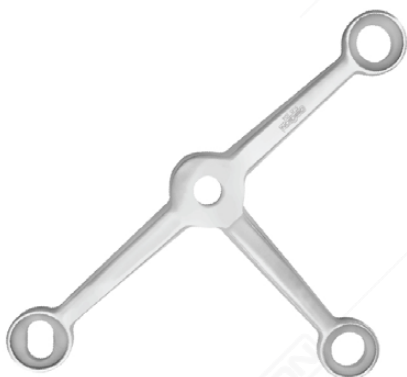


SF 2203
220MM SSS



SF 2204
220MM SSS

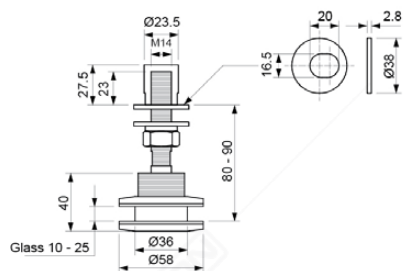


SF 2241
220MM (ROUTE) SSS



SF 2245
220MM (BASE) SSS
Material : Stainless Steel SUS 304 + Iron

GG 220 SERIES

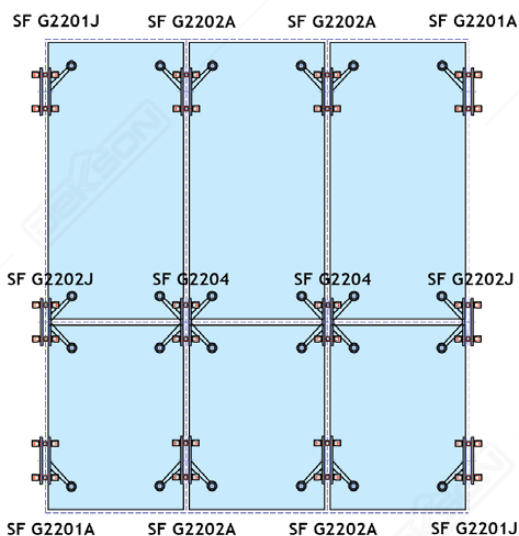

ILLUSTRATIONS

Capacity (max) : 220 Kg / Glass sheet



Glass Thickness

- Structure : 18 - 35 mm
- Panel : 10 - 24 mm



* Sheet of glass supported by 4 pieces of spider fitting legs (4 Routels).





SF G2201A
GLASS STRC SSS





SF G2201J
GLASS STRC SSS





SF G2202A
GLASS STRC SSS






SF G2202J
GLASS STRC SSS



SF G2204
GLASS STRC SSS

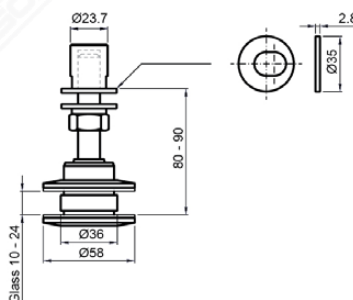

SF G2241
GLASS ROUTEL STRC SSS

KEY FOR SPIDER FITTING



ROUTEL SF 2241 PIN ATAS



BASE SF 2245 PIN ATAS




BASE SF 2245 PIN SAMPING



UNIVERSAL PIN ATAS





UNIVERSAL PIN SAMPING

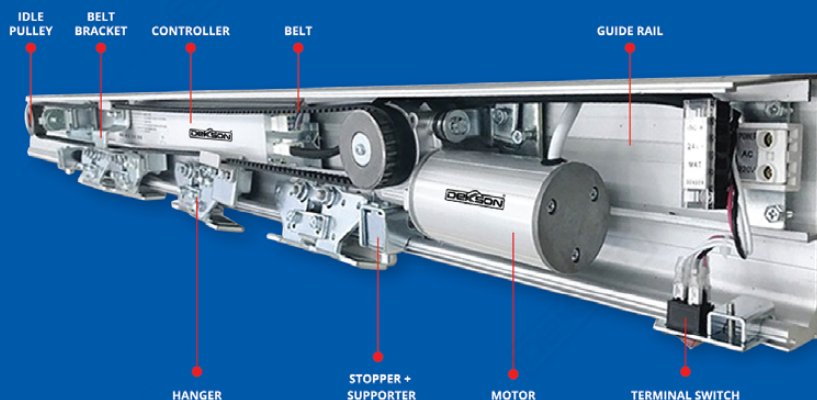

SLIDING GLASS DOOR


Automatic Sliding Door ASD - D120B

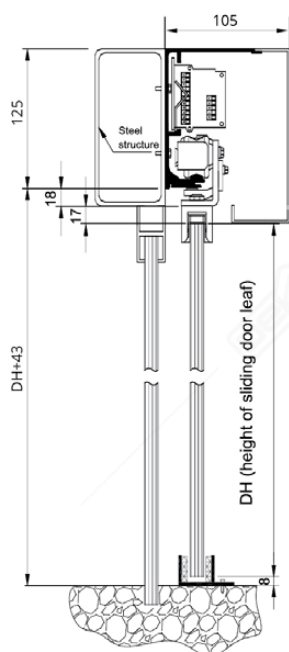

*accessories can be ordered separately

SPECIFICATION :

Door leaf	Single leaf	Double leaves
Weight of door leaf	Max. 150 kg	Max. 2 x 120kg
Width of door leaf	DW = 750 - 1600mm	DW = 650 - 1050mm
Width of door opening	W = Max. 1550mm	W = Max. 2000mm
Method of Installation	Surface Installation	
Supply power voltage	AC 110-220V±10%, 50/60 Hz	
Opening Speed	150-460mm/s (adjustable)	
Closing Speed	130-460mm/s (adjustable)	
Door hold-open time	0-8s (adjustable)	
Manual open/close force		
Motor	DC 24 V, 60~70W(DC, brushless)	
Working Environment temperature	-20°C~50°C	

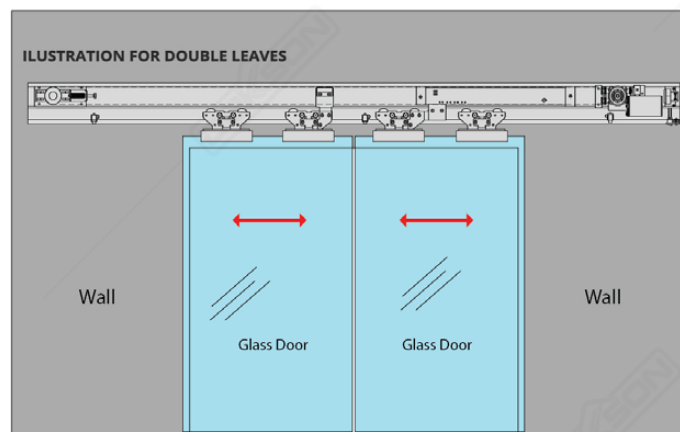

SLIDING GLASS TELESCOPIC

SGT 4100 (3+1) NA



LUG HOLDER
(1 pc)



ROLLER
(6 pcs)



STOPPER
(6 pcs)



FLOOR GUIDE
(2 pc)



FLOOR GUIDE FIX
Kaca 10mm (1 pc)
Kaca 12mm (1 pc)



SINGLE HOLE LUG
(2 pc)



DOUBLE HOLE LUG
(2 pc)



STEEL ROPE
Ø1.5mm X 2.5m
(2 pcs)



HYDRAULIC DAMPER
(3 pcs)



GLASS CLIP GLASS DOOR 1
(2 pairs)




GLASS CLIP GLASS DOOR 2
(1 pairs)



SLIDING LOCK (1 set)

TRACK FOR SGT 4100 (3+1) NA + COVER

*Track & Cover to be order separately

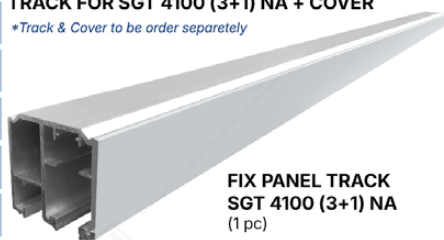

FIX PANEL TRACK
SGT 4100 (3+1) NA
(1 pc)



DOOR PANEL TRACK
SGT 4100 (3+1) NA
(2 pc)





COVER TRACK
SGT 4100 (3+1) NA
(2 pcs)

ILLUSTRATIONS

Glass Thickness:
10-12 mm

Weight Glass Door / leaf :
80 kg

Width Opening:
4000 mm

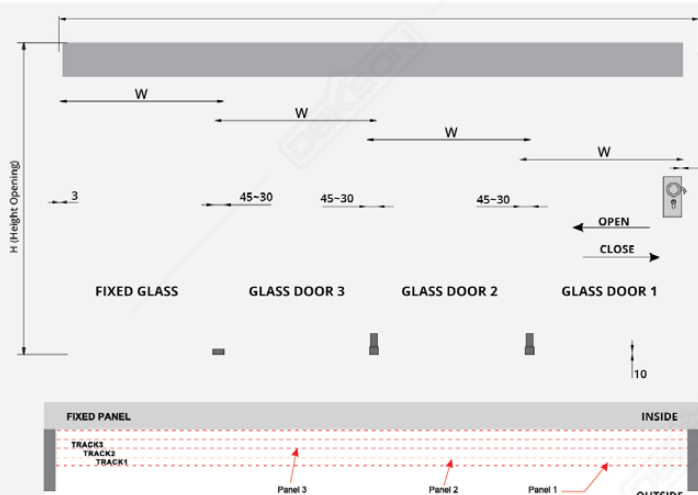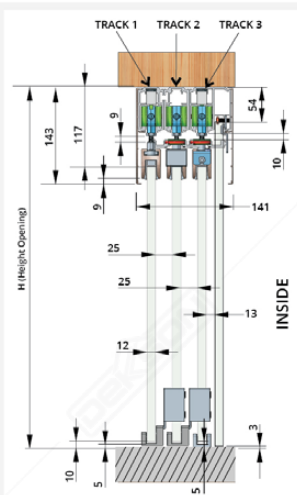

LUG HOLDER
(1 pc)

ROLLER
(4 pcs)

STOPPER
(4 pcs)

FLOOR GUIDE
(1 pc)

FLOOR GUIDE FIX
Kaca 10mm (1 pc)
Kaca 12mm (1 pc)

SINGLE HOLE LUG
(1 pc)

DOUBLE HOLE LUG
(1 pc)

STEEL ROPE
Ø1.5mm X 2.5m


HYDRAULIC DAMPER
(2 pcs)

GLASS CLIP GLASS DOOR 1
(1 pairs)

GLASS CLIP GLASS DOOR 2
(1 pairs)

SLIDING LOCK (1 set)

*Track & Cover to be order separately

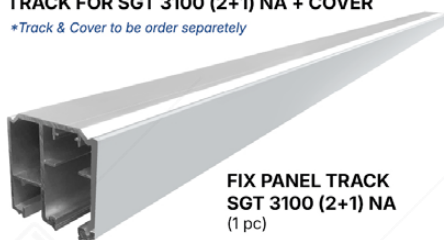

**FIX PANEL TRACK
SGT 3100 (2+1) NA**
(1 pc)



DOOR PANEL TRACK
SGT 3100 (2+1) NA
(1 pc)





COVER TRACK
SGT 3100 (2+1) NA
(2 pcs)

Glass Thickness:
10-12 mm

Weight Glass Door / leaf :
80 kg


Width Opening:
3000 mm

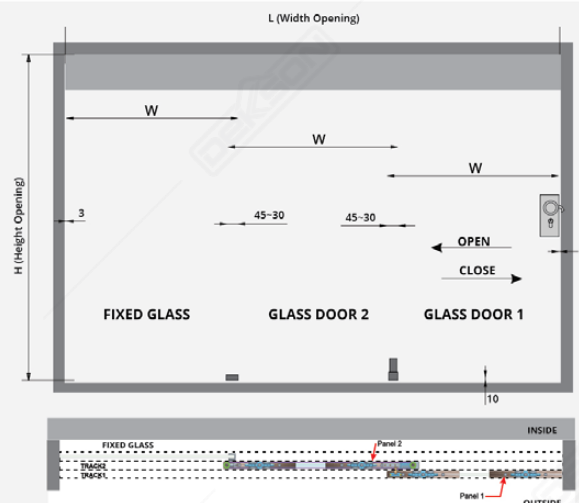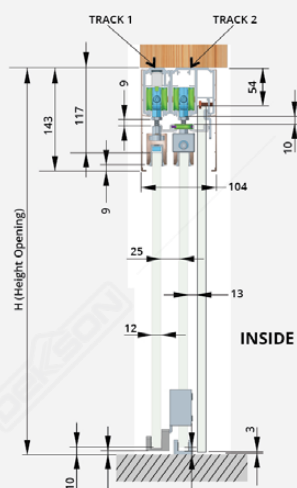

SLIDING GLASS DOOR

Deluxe Magtec SD12 ACC SSS



MATERIAL : STAINLESS STEEL SUS 304

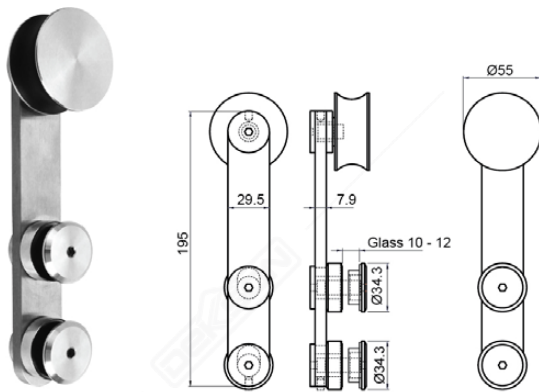


ROLLER FOR TUBE
(2 pcs)




TUBE COVER
(2 pcs)




TUBE CONNECTOR (GG)
(4 pcs)




FLOOR GUIDE
(1 pc)




STOPPER (LEFT/RIGHT)
(2 pcs)



TUBE



TUBE CONNECTOR
ACC SD 204 (GW)




**to be ordered separately*


ILLUSTRATIONS

Capacity (max):
65 Kg / Glass sheet


Glass Thickness:
10 - 12 mm



FIXING ON WALL

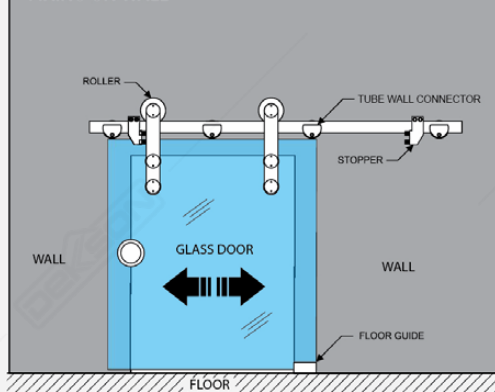


FIXING ON GLASS

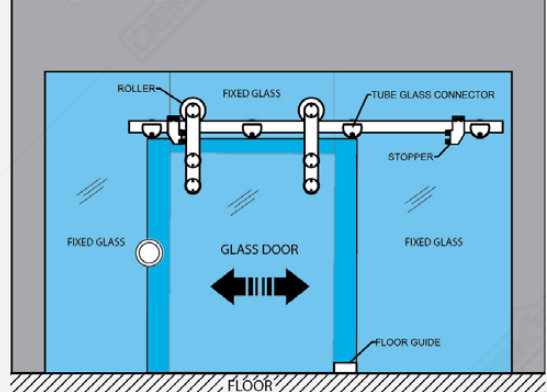

SLIDING GLASS DOOR


Hydraulic Soft Closer
SLD HYD8970A SSS

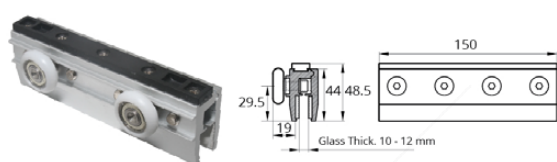

CLAMP ROLLER
(2 pcs)




END CAP
(2 pcs)

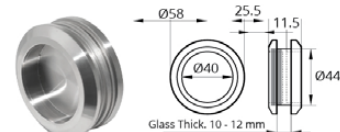


DOOR HANDLE
(1 pc)



SOFT CLOSER
(2 pcs)




FLOOR GUIDE 10 MM
(1 pcs)




FLOOR GUIDE GLASS 10 MM




FLOOR GUIDE 12 MM
(1 pcs)



FLOOR GUIDE GLASS 12 MM

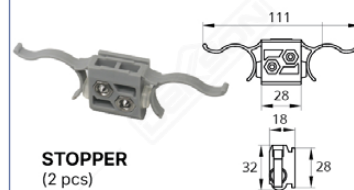


STOPPER
(2 pcs)

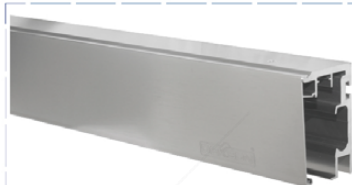


TRACK SLD HYD8970A 2.2 M SAT + COVER
Material : Aluminium


Available :
TRACK SLD HYD8970A 3 M SAT + COVER
TRACK SLD HYD8970A 4.2 M SAT + COVER



GLASS CLAMP
FOR TRACK HYD8970A PSS



Glass Thick. 10 mm - 12 mm





*to be ordered separately



ILLUSTRATIONS

Capacity (max) : 120 kg
Glass Thickness : 10 - 12 mm

Fixing On WALL

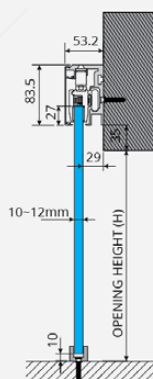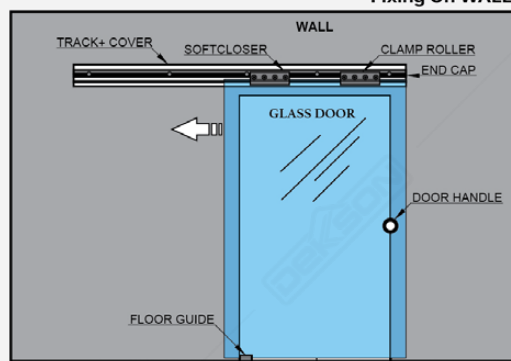


Fixing On glass

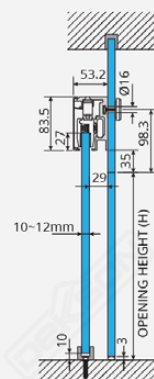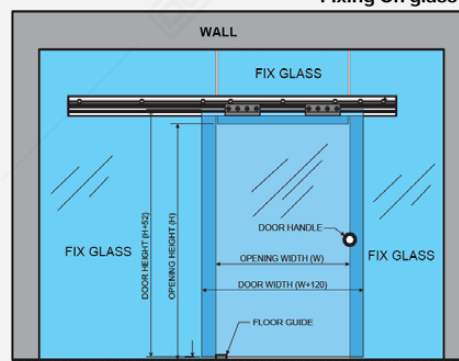


SLIDING GLASS DOOR

L4 SGD ACC L4 8207A SET

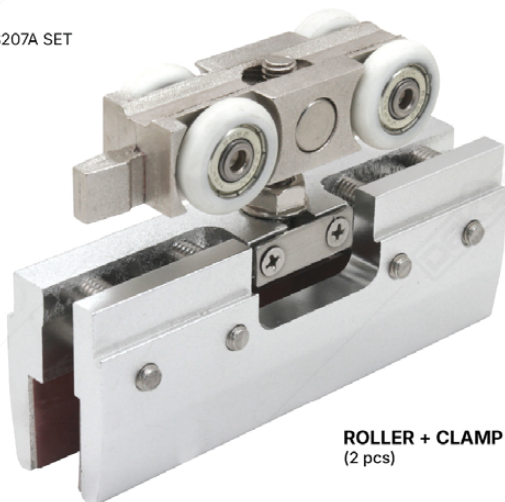


STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)



FLOOR GUIDE
(1 pc)



FLOOR GUIDE INSET 12 MM
(1 pc)

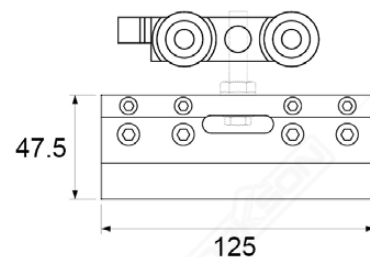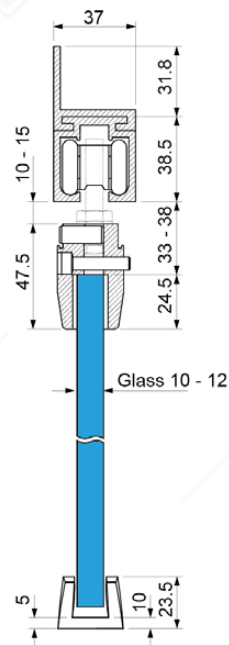


SR D6 Track 2M / 3M

** to be ordered separately.*

Track : 2000 / 3000 mm
Max. Capacity : 150 Kg
Glass Thickness : 10 mm - 12 mm

Type	Max. Capacity	Glass thickness	Track
L6	150 kg	10 - 12 mm	2000/3000 mm

L6 SGD ACC 8922-57 COMPLETE SET

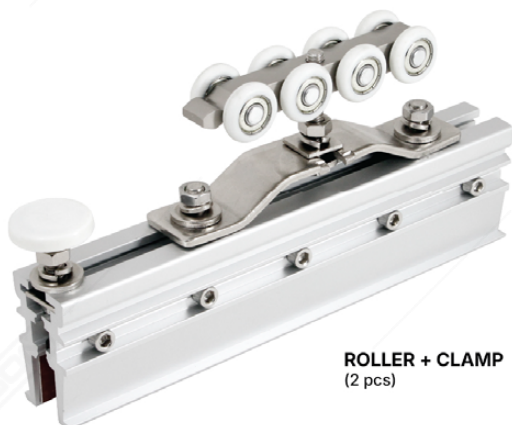


STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)



FLOOR GUIDE
(1 pc)



FLOOR GUIDE INSET 12 MM
(1 pc)

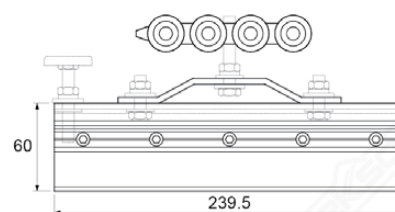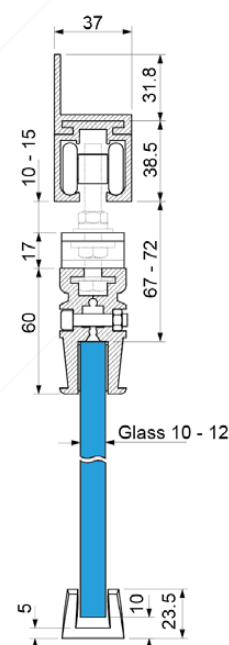

SR D6 Track 2M / 3M

** to be ordered separately.*


Track : 2000 / 3000 mm
Max. Capacity : 100 Kg
Glass Thickness : 10 mm - 12 mm

Type	Max. Capacity	Glass thickness	Track
L4	100 kg	10 - 12 mm	2000/3000 mm

S6
SGD ACC 8922-63 COMPLETE SET



ROLLER + CLAMP
(2 pcs)

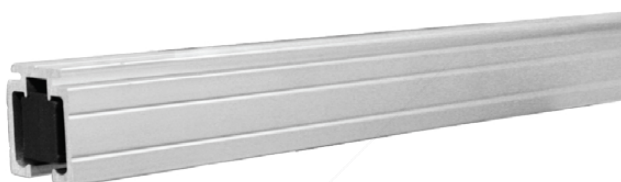

SR D6 Track 2M / 3M


** to be ordered separately.*

Track : 2000 / 3000 mm
Max. Capacity : 150 Kg
Glass Thickness : 10 mm - 12 mm

Type	Max. Capacity	Glass thickness	Track
S6	120 kg	10 - 12 mm	2000/3000 mm



STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)




FLOOR GUIDE
(1 pc)




FLOOR GUIDE INSET 12 MM
(1 pc)

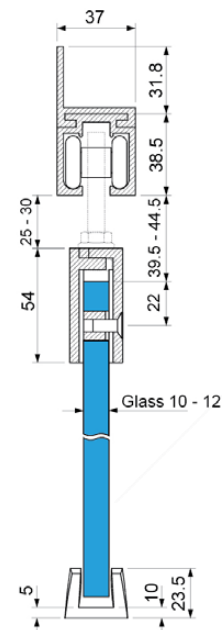

SR 89-2280-4RD SSS SET

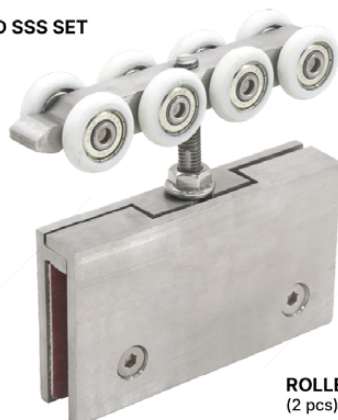

ROLLER + CLAMP
(2 pcs)

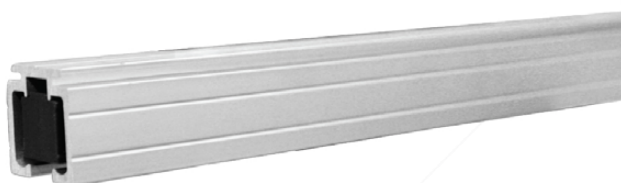

SR D6 Track 2M / 3M


** to be ordered separately.*

Track : 2000 / 3000 mm
Max. Capacity : 200 Kg
Glass Thickness : 10 mm - 12 mm

Type	Max. Capacity	Glass thickness	Track
SR 89 2280-4RD	200 kg	10 - 12 mm	2000/3000 mm



STOPPER
(2 pcs)





FLOOR GUIDE INSET 10 MM
(1 pc)



FLOOR GUIDE
(1 pc)



FLOOR GUIDE INSET 12 MM
(1 pc)

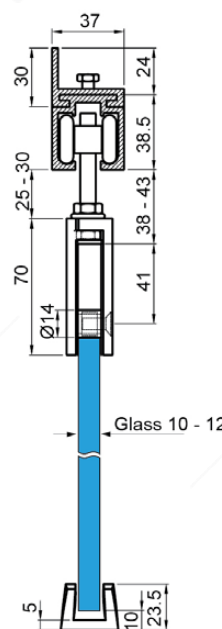

SLIDE & FOLD GLASS DOOR

SLF 8610

MATERIAL : STAINLESS STEEL SUS 304



TOP ROLLER & TOP PIVOT HINGE



PV 861020 SSS



RH 86103 SSS



NH86102 SSS



RH 86102 SSS



RH 86101 SSS

BOTTOM HINGE & LOCK BOLT HINGES & BOTTOM PIVOT HINGE



PV 861010 SSS



LH 861030 SSS



LH 86102 SSS



GH 861040 SSS



GH 8610401 SSS



LH86101 SSS



DP 89001WS SSS
BOLT KEEPER WITH DUST PROOF



TRACK 5,8M NA
Available : 2 M
3,8 M




U-CHANNEL
19.5x19.5x1.8x4.5M NA
Available : 19.5x19.5x1.8x2.25 M



**DYNASET M8X30+
BOLT M8X20**

ILLUSTRATIONS

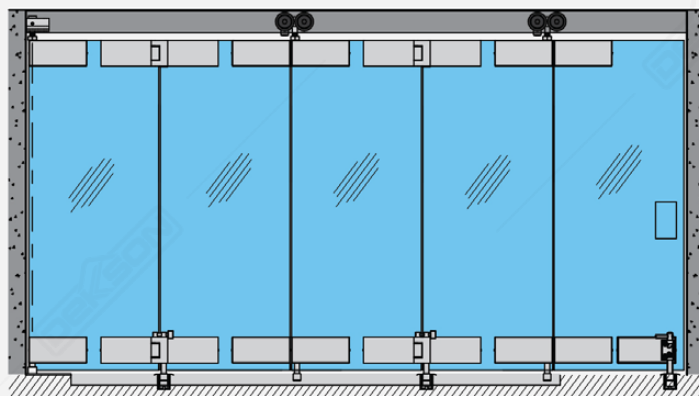

Height Max : 2700 mm
Width Max : 800 mm
Glass Thickness : 10 mm & 12 mm
Weight Max : 65 kg / panel
Max. Leaf per set : 7 panel


PULL HANDLE

Quality Design and Quality Finishing

With simplistic design and a quality finishing, Dekkson pull handle for glass door blend well with the overall style of modern glass doors. Dekkson pull handle for glass door is manufactured from stainless steel SUS 304 its quality will enhance glass doors aesthetic and function.



PH DL804
32x332x300 PSS
Material : SUS 304




PH DL809
32x382x350 PSS
Available in :
25x225x200 PSS
32x332x300 SSS
32x332x300 PSS
32x382x350 SSS
Material : SUS 304




PH DL809
32x382x350 WHITE
Available in :
25x325x300 WHITE
Material : SUS 304




PH DL809
32x382x350 MATT BLACK
Available in :
25x325x300 MATT BLACK
Material : SUS 304




PH DL810
38x600x400 PSS+SSS
Available in :
38x800x600 PSS+SSS
38x1000x800 PSS+SSS
Material : SUS 304

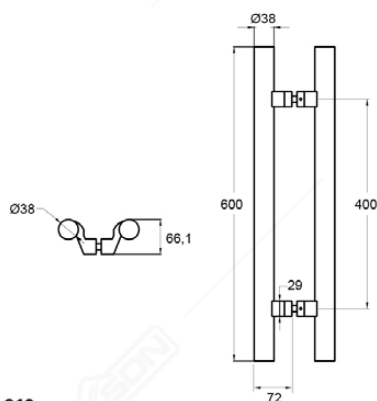

PH DL441
20x38x600x425 PSS+SSS
Available in :
20x38x800x625 PSS+SSS
Material : SUS 304

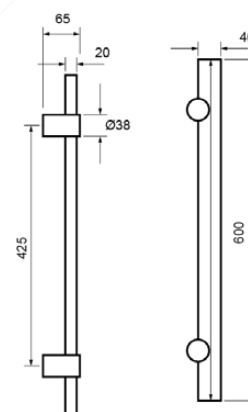



PH DL446


32x600x400 SSS

Available in :

32x400x250 SSS

32x800x600 SSS

Material : SUS 304



PH DL1831

25X500X235 PSS+SSS

Available in :

32X500X235 PSS+SSS

Material : SUS 304


PH DL814 SQ

25X25X(525/225)X(500X200) PSS

Available in :

19X19X(519/219)X(500X200) PSS

Material : SUS 304

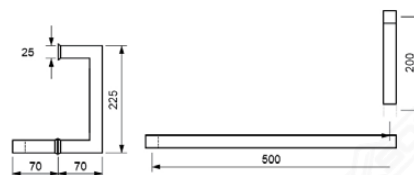

PH DL814

25X(475/175)X(450X150) PSS

Available in :

25X(525/225)X(500X200) PSS


Material : SUS 304



PH DL814

25X(475/175)X(450X150) MATT BLACK


Material : SUS 304

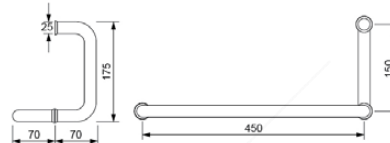

PH DL814

25X(525/225)X(500X200) GM

Material : SUS 304

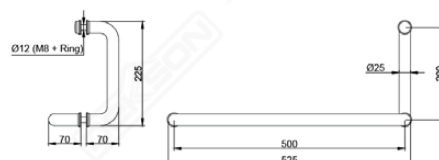


PH SQ 12X12X619X600 + 830 BR

Profile Dimension : 12X12 mm

Available :

Chrome Polish, Brush Gun Metal, Satin Brass

Material : Brass



DOOR KNOB

Grip and Slide


Dekkson offer various design for glass door knob, but in general it has a minimalistic-modern design. It is a perfect fit for seamlessly styled contemporary building. And just like every other products from Dekkson, it has a highly dependable quality.



DK AL 82801 CP
Material : Aluminium




DK AL 82801 MATT BLACK
Material : Aluminium



DK AL 82803 CP
Material : Aluminium




DK AL 82803 MATT BLACK
Material : Aluminium




DK AL 82808 CP
Material : Aluminium




DK AL 82808 MATT BLACK
Material : Aluminium



DK 8716 58 MM SSS
Material : Stainless Steel SUS 304



DK 830 BR
Available :
Chrome Polish, Brush Gun Metal, Satin Brass
Material : Brass



SLIDING GLASS LOCK & GLASS DOOR LOCK


Security, alongside of aesthetic and functionality, is an essential element that must not be neglected on doors. Dekkson glass lock variants are assembled from high quality materials, exhibiting both dependable mechanism and fine design.



SGL 7600 SUS 304 (GW) SSS

Material : Stainless Steel SUS 304

* Cylinder DC DL 55 mm SN to be ordered separately

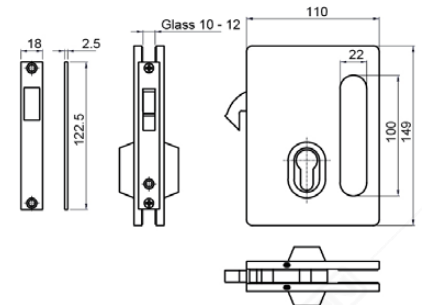


10-12 mm glass thickness



SGL 7601 SUS 304 (GG) SSS

Material : Stainless Steel SUS 304

* Cylinder DC DL 55 mm SN to be ordered separately

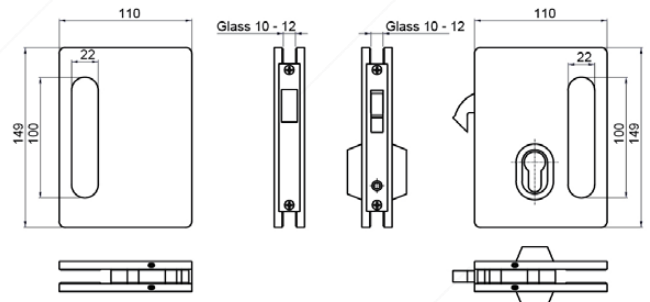


10-12 mm glass thickness



SGL 8656 (GW) SSS

Material : Stainless Steel SUS 304


* Cylinder to be ordered separately

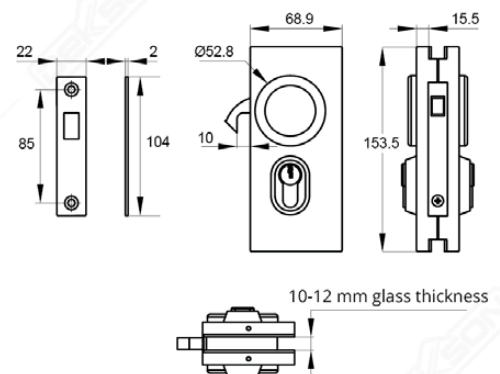


10-12 mm glass thickness




SGL 8656 (GG) SSS - KEEPER
Material : Stainless Steel SUS 304




SGL 8656 (GG) SSS FIX - KEEPER
Material : Stainless Steel SUS 304

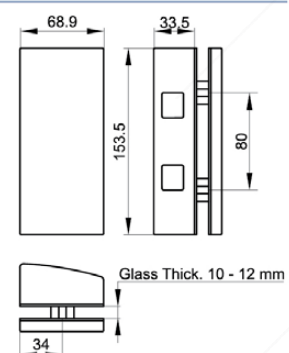


GDL 38225 PSS



GDL 38225A PSS




GDL 38231 PSS

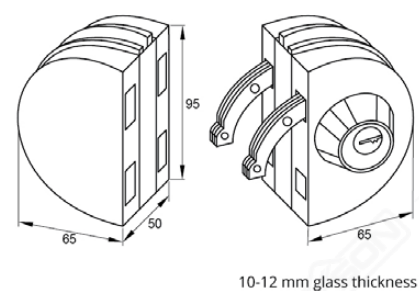




GDL 8037D (GW) SSS

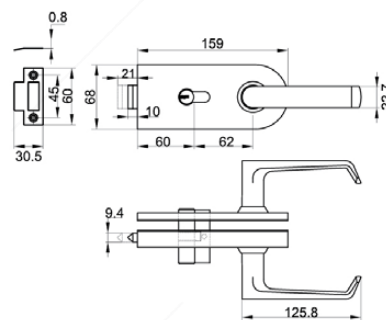

Glass Thick. 10 - 12 mm




GDL 8037D (GG) SSS - KEEPER



Glass Thick. 10 - 12 mm




GL 8600C CP

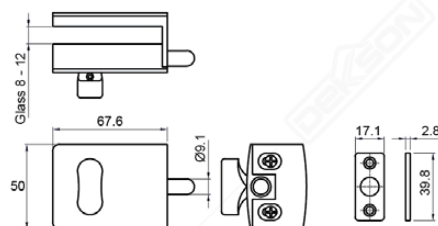

8-12 mm glass thickness




8601C CP KEEPER




8-12 mm glass thickness



IL 8620 CP

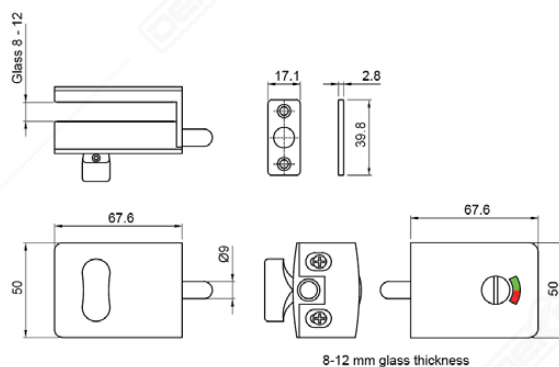


8-12 mm glass thickness

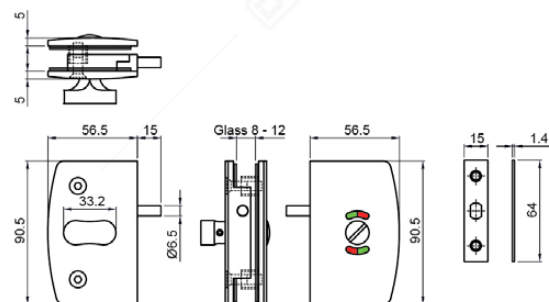


IL 8800 GW CP

8-12 mm glass thickness

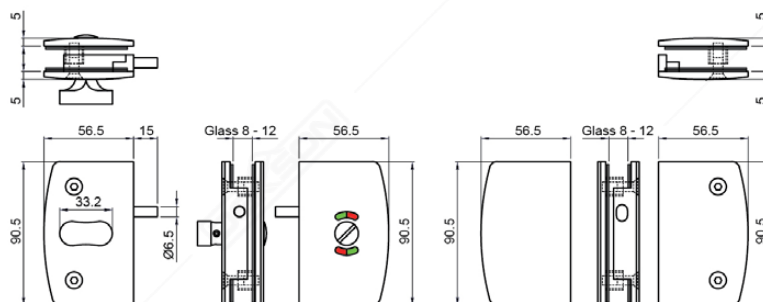


IL 8801 GG CP


8-12 mm glass thickness

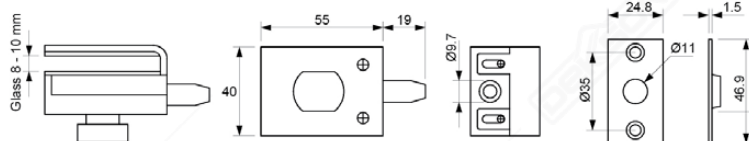


GL 621 CP



GL 621-1 CP

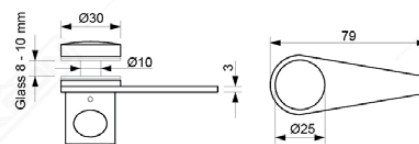

GL 622 CP



GL 622-1 CP


SHOWER DOOR

Stay Clean, Stay Comfortable

Modern shower room design usually separate dry areas and wet areas using glass separators. Dekkson shower door accessories support the glass elements in shower room to create a satisfyingly aesthetic and convenient personal area in houses and apartments. Dekkson present various shower hinges and sliding shower door sets, all of which has high dependability and value for money.




SHOWER HINGE HYDRAULIC

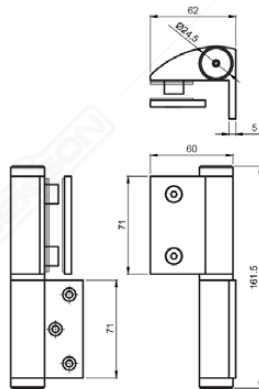


SHH 502 MATT BLACK (GLASS TO WALL)

Available : • Left Out • Right Out
• Left In • Right In

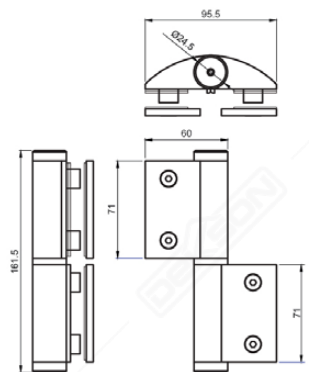


SHH 503 MATT BLACK (GLASS TO GLASS)

Available : • Left
• Right

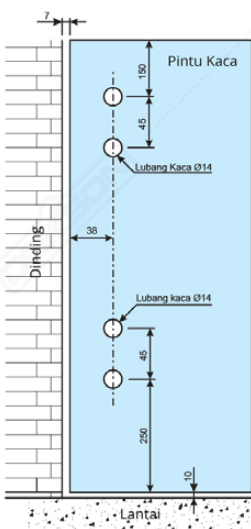


ILLUSTRATIONS


OPEN OUTSIDE



OPEN INSIDE




Material : Aluminium
Glass Thickness : Min. 8-12 mm
Max. Door Weight : 60 kg / pairs
Max. Door Height : 2000 mm
Max. Door Width : 900 mm
Max. Door Opening : 150°
Hold Open : 90°
Adjust Speed & Power

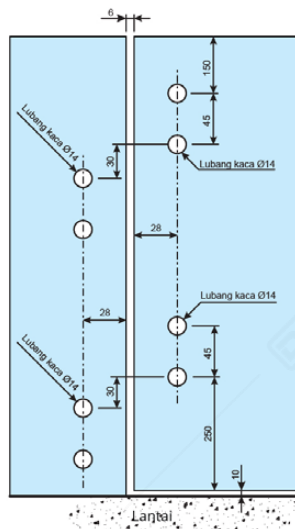


ILLUSTRATIONS

OPEN OUTSIDE



OPEN INSIDE



Material : Aluminium
Glass Thickness : Min. 8-12 mm
Max. Door Weight : 60 kg / pairs
Max. Door Height : 2000 mm
Max. Door Width : 900 mm
Max. Door Opening : 150°
Hold Open : 90°
Adjust Speed & Power

CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan



• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat

CARA PENGATURAN KECEPATAN & KEKUATAN



• Putar searah jarum jam untuk kekuatan menutup yang lebih kuat
• Putar berlawanan arah jarum jam untuk kekuatan menutup yang lebih ringan



• Putar searah jarum jam untuk kecepatan menutup yang lebih pelan
• Putar berlawanan arah jarum jam untuk kecepatan menutup yang lebih cepat



SHOWER HINGE HYDRAULIC 88 SERIES

SOFT CLOSE





SSH 8801 (GW) PSS
Glass to wall hinge

Material : SUS 304
Door Thickness : 8 - 12 mm
Capacity Max : 45 Kg / pairs

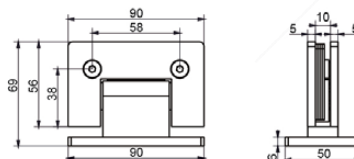

SSH 8803 (GG) PSS
Glass to Glass hinge

Material : SUS 304
Door Thickness : 8 - 12 mm
Capacity Max : 45 Kg / pairs

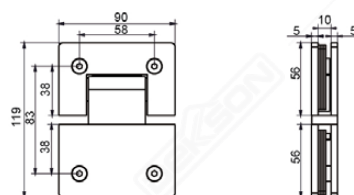



SHOWER HINGE LUXURIOUS - S SERIES

**LUXURIOUS
SERIES**





**LSH S9801 (GW) 90°
CHROME POLISH**
Available : • Satin Brass
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs

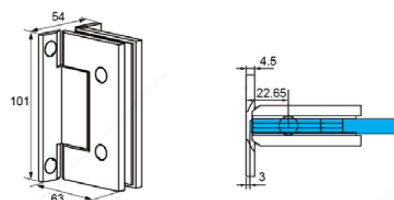



**LSH S9802 (GW) 90°
BRUSH GUN METAL**
Available : • Satin Brass
• Chrome Polish

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs

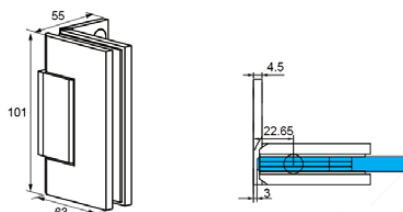

**LSH S9803 (GG) 180°
SATIN BRASS**
Available : • Brush Gun Metal
• Chrome Polish

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



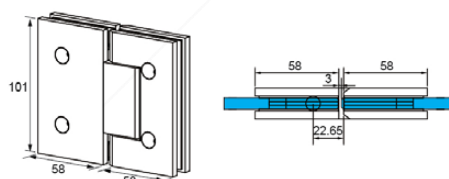




**LSH S9804 (GG) 90°
CHROME POLISH**

Available : • Satin Brass
• Brush Gun Metal




Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs



**LSH S9805 (GG) 135°
BRUSH GUN METAL**

Available : • Chrome Polish
• Satin Brass

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 65 Kg / pairs






GLASS CLIP - S SERIES



**LGC S980 (GW) 90°
BRUSH GUN METAL**

Available : • Satin Brass
• Chrome Polish




Material : Brass
Door Thickness : 10 & 12 mm



**LGC S980 (GG) 90°
SATIN BRASS**

Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm



SHOWER HINGE LUXURIOUS - T SERIES




**LUXURIOUS
SERIES**



**LSH T9701 (GW) 90°
CHROME POLISH**

Available : • Satin Brass
• Brush Gun Metal



Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs








**LSH T9702 (GW) 90°
CHROME POLISH**
Available : • Satin Brass
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs






**LSH T9703 (GG) 180°
BRUSH GUN METAL**
Available : • Satin Brass
• Chrome Polish

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs






**LSH T9704 (GG) 90°
CHROME POLISH**
Available : • Satin Brass
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs



**LSH T9705 (GG) 135°
SATIN BRASS**
Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm
Capacity Max : 50 Kg / pairs






GLASS CLIP - T SERIES






**LGC T970 (GG) 90°
BRUSH GUN METAL**
Available : • Chrome Polish
• Satin Brass

Material : Brass
Door Thickness : 10 & 12 mm



**LGC T970 (GW) 90°
SATIN BRASS**
Available : • Chrome Polish
• Brush Gun Metal

Material : Brass
Door Thickness : 10 & 12 mm





SHOWER HINGE 93 SERIES

Capacity max : 50kg/pair



HEAVY DUTY

SH 9301 (GW) CP
Glass to wall hinge
Material : Brass





8-12 mm glass thickness



HEAVY DUTY

SH 9303 (180) CP
Glass to glass 180° hinge
Material : Brass





8-12 mm glass thickness

SHOWER HINGE 82 SERIES



SH MF8201 SSS
Glass to wall hinge
Material : Stainless Steel SUS 304





8-10 mm glass thickness

SHOWER HINGE 83 SERIES



SH 8331 CP
Floor to glass hinge
Material : Brass





8-10 mm glass thickness

SHOWER HINGE 87 SERIES (ADJUSTABLE)



ASH 8701 CR (GW) CP
Glass to wall hinge
Material : Brass



8-10 mm glass thickness

SHOWER HINGE 77 SERIES



SH 7701 (GW) CP
Glass to wall hinge
Material : Brass





Available color :
SH 7701 (GW) MATT BLACK



SH 7701 (GW) GUN METAL





SH 7701 (GW) BLACK PEARL



8-10 mm glass thickness



SH 7702 (GW) CP
Glass to wall hinge
Material : Brass





8-10 mm glass thickness



SH 7703 (180) CP
Glass to glass 180° hinge
Material : Brass





Available color :
SH 7703 (180) MATT BLACK



8 -10 mm glass thickness



SH 7704 (90) CP
Glass to glass 90° hinge
Material : Brass





8 -10 mm glass thickness



SH 7705 (135) CP
Glass to glass 135° hinge
Material : Brass



Available color :
SH 7705 (135) MATT BLACK



8 -10 mm glass thickness

SHOWER HINGE 54 SERIES





SH 5401 (GW) PSS

Glass to wall fixed hinge
Material : Stainless Steel SUS 304



Available color :
SH 5401 (GW) MATT BLACK

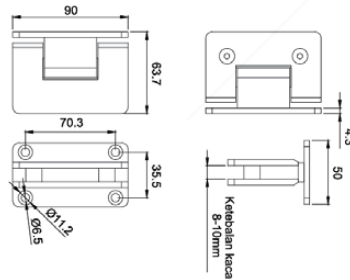

8 -10 mm glass thickness





SH 5403 (GG) 180 PSS

Glass to glass 180° hinge
Material : Stainless Steel SUS 304



Available color :
SH 5403 (GG) MATT BLACK

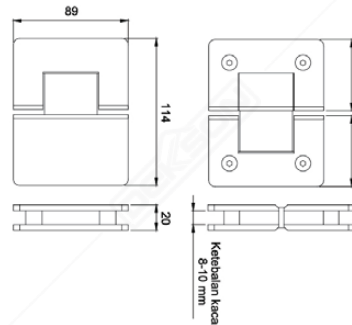

8 -10 mm glass thickness

SHOWER HINGE 53 SERIES





SH 5301 (GW) PSS

Glass to wall fixed hinge
Material : Stainless Steel SUS 304



Available color :
SH 5301 (GW) MATT BLACK



8 -10 mm glass thickness





SH 5303 (GG) 180 PSS

Glass to glass 180° hinge
Material : Stainless Steel SUS 304



Available color :
SH 5303 (GG) MATT BLACK





8 -10 mm glass thickness



SH 5305 (GG) 135 PSS

Glass to glass 135° hinge
Material : Stainless Steel SUS 304









8 -10 mm glass thickness

SLIDING SHOWER



SS8490 ACC PSS

MATERIAL : STAINLESS STEEL SUS 304

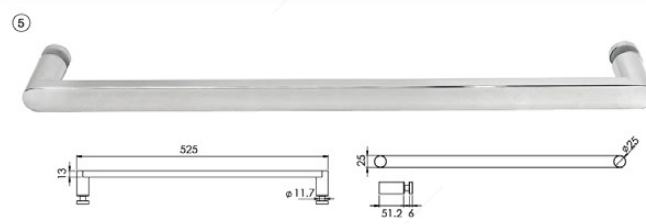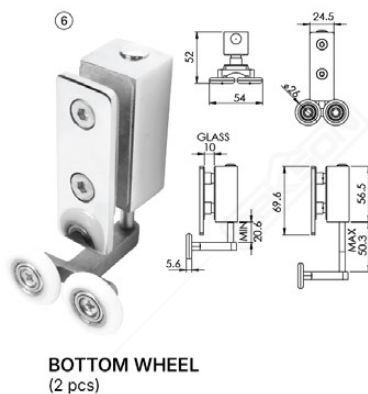


ILLUSTRATIONS

Capacity Max : 90 Kg
Glass Thickness : 10 mm

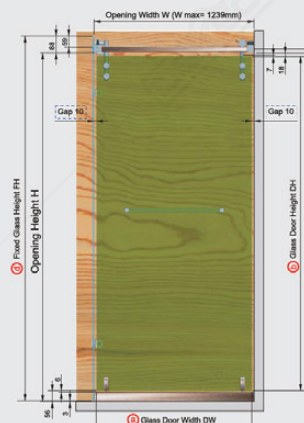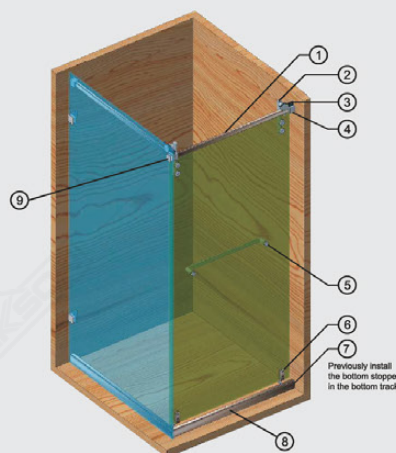


SLIDING SHOWER


SD S001 COMP + TRACK

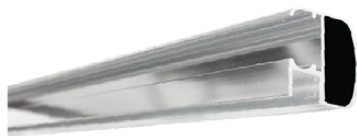


TOP TRACK
SD S001 - 01A
2000 mm Long




DOOR KNOB
SD S001- 07 (1 pc)




FLOOR GUIDE
SD S001-03 (1 pc)




KNOB CLAMP ROLLER
SD S001 - 04 (2 pcs)




ROLLER STOPPER
SD S001-03 A (2 pcs)



MOUNTING BRACKET
SD S001-02A (2 pcs)




TRACK CONNECTING
SD S001- 02 90 DEGREE





*To be order separately

ILLUSTRATIONS

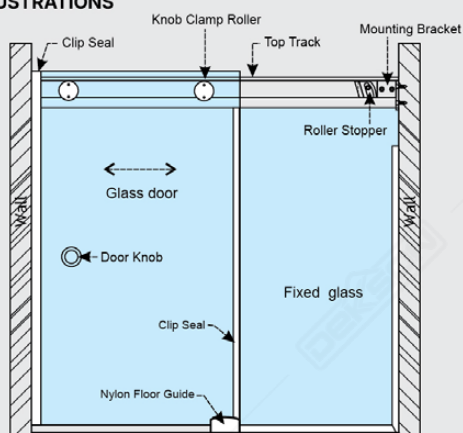

Capacity Max : 50 kg
Glass Thickness : 8 ~ 10 mm
Height Max : 2100 mm

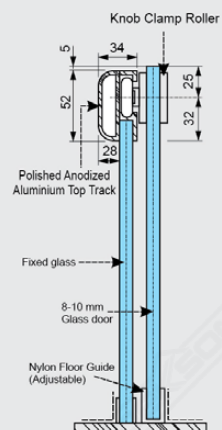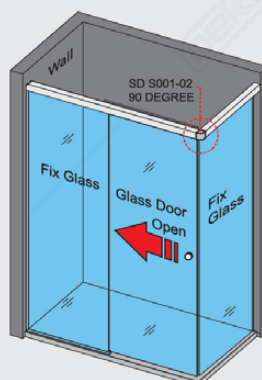


SLIDING SHOWER

SS02 ACC PSS


MATERIAL : STAINLESS STEEL SUS 304




FLOOR GUIDE
(1 pc)




TRACK HOLDER FOR FIXED PANEL
(2 pcs)




ROLLER
(2 pcs)





TRACK HOLDER FOR WALL
(2 pcs)




STOPPER
(2 pcs)



ANTI LIFT
(2 pcs)

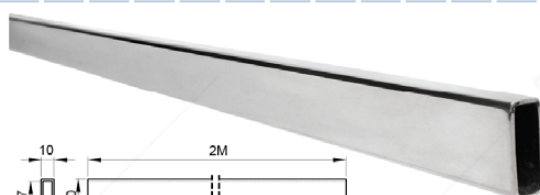


SS02 TRACK PSS
2000 mm Long




SS02-13 90 DEGREE PSS


*to be ordered separately





TRACK HOLDER FOR FIXED PANEL
(2 pcs)



ILLUSTRATIONS

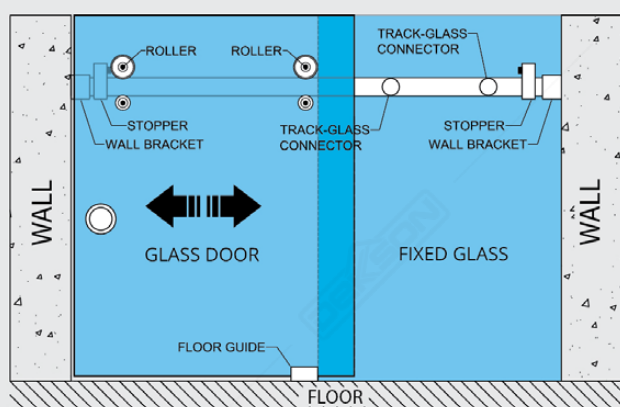

Capacity Max : 65 kg
Glass Thickness : 8 ~ 10 mm
Height Max : 2000 mm

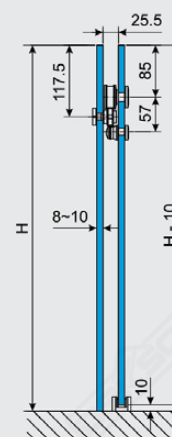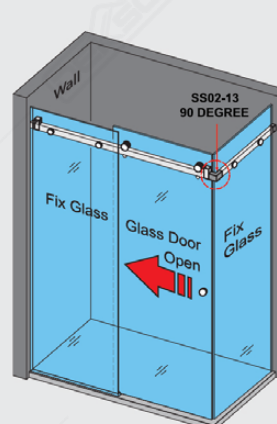

SLIDING SHOWER

SOFT (OPEN+CLOSE) SS816



TOP ROLLER
(2 pcs)



HANDLE

SS816 (WW) CP

Available color : ORB



**180° GLASS TO SLIDING
TRACK CONNECTOR**



**90° GLASS TO SLIDING
TRACK CONNECTOR**
Left Or Right



WALL MOUNT BRACKET
Left Or Right



THRESHOLD HOLDER TO WALL
Left Or Right



FLOOR GUIDE
Left Or Right



THRESHOLD HOLDER TO GLASS
Left Or Right

SOFT (CLOSE+OPEN) SS816 TRACK CP

Available color : ORB



KIT FOR SOFT CLOSING



CLIP SEAL
(1934 MM)



THRESHOLD
(640 MM)





U-CHANNEL FOR FIX GLASS
(2000 MM + 573 MM)




UPPER TRACK + COVER
(1230 MM)

ILLUSTRATION


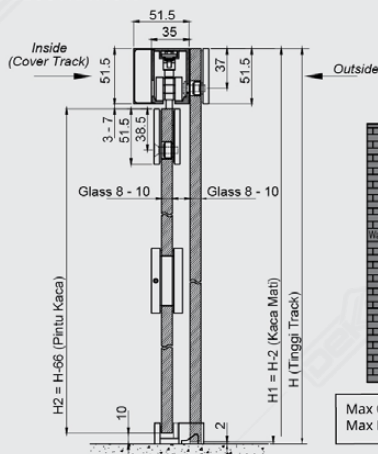


Max Opening Width : 1241 mm
Max Door Height : 2000 mm

LEFT TO OPEN WALL TO GLASS
Available : RIGHT

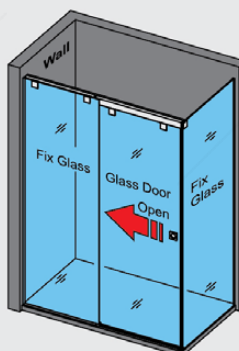

RIGHT TO OPEN WALL TO WALL
Available : LEFT

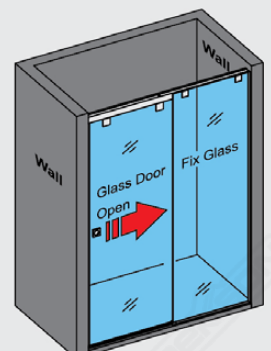

CUBICAL SYSTEM FOR TOILET

For Offices and Public Spaces

A comfortable toilet in public spaces is not only needed, but expected. Dekkson cubical system set for toilet provides an all-in package that includes every architectural hardware needed to support a modern toilet cubicle. From the cubical stand to glass clip, everything is manufactured to last for a long period of time.

OTHER ACCESSORIES

①



GC 018 (GW) PSS

②



GC 018 (GG) PSS

③



SH 5303 (GG) 180 PSS
Material : SUS 304

④



KT SOLID 304 (160MM) SSS

⑤



IL 8620 CP + 861C CP KEEPER

⑥



GH 25-01 CP

⑦



GH 25-02 CP

⑧



GH 25-05 CP

⑨



GH 25-04 CP

⑩





PH DL814 25X(475/175)X(450X150) PSS
Material : SUS 304

⑪



DK AL82803 CP
Material : Aluminium


ILLUSTRATIONS

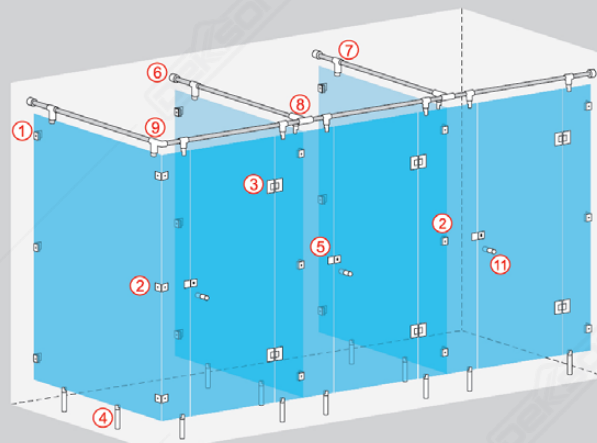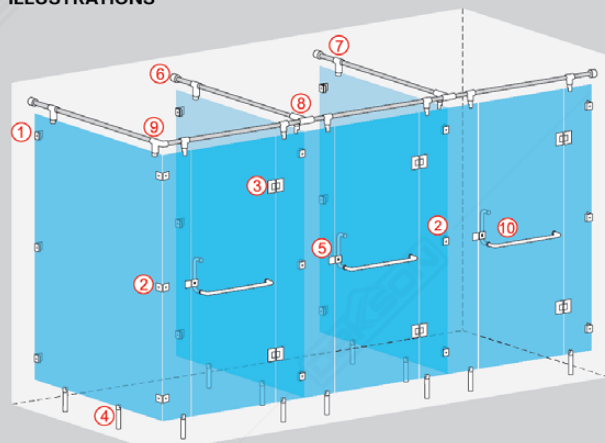


CUBICAL TOILET



CUBICAL TOILET
KT 304 (1600 MM) HD SSS
Glass to floor applications




CUBICAL TOILET
CT 001 (8-10MM) SSS
Glass to floor applications
Available Color : PSS

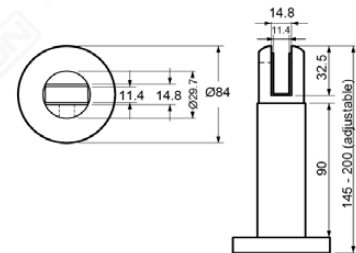


GLASS HOLDER




GLASS HOLDER
GH 19-01 CP




GLASS HOLDER
GH 19-02 CP




GLASS HOLDER
GH 19-03 CP







GLASS HOLDER
GH 25-01 CP




GLASS HOLDER
GH 25-02 CP



GLASS HOLDER
GH 25-03 CP



GLASS HOLDER
GH 25-04 CP

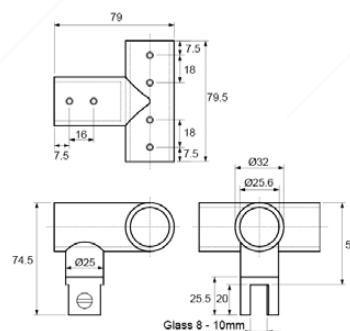



GLASS HOLDER
GH 25-05 CP

GLASS CLIP




GLASS CLIP GC Z-15G CP
Glass to wall applications



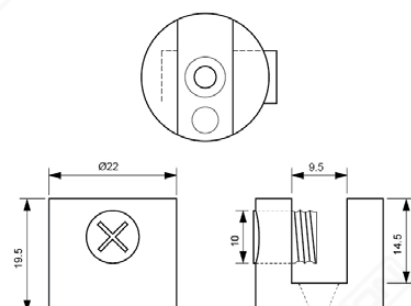






GLASS CLIP
GC BL002 SN
Glass to wall applications

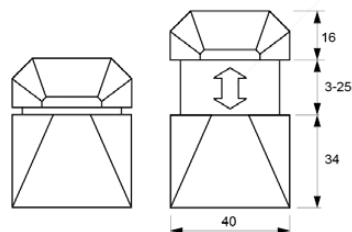



GLASS CLIP
GC BL003 SN
Glass to wall applications




GLASS CLIP
GC D009 SN
Glass to wall applications

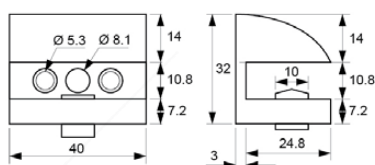

GLASS CLIP
GC U8541 PSS
Glass to wall applications




GLASS CLIP
GC U800 AL CP
Glass to floor applications


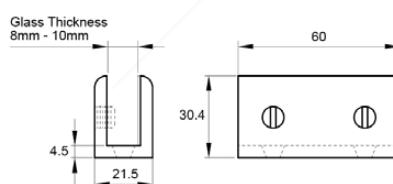






GLASS CLIP
U820 PSS
Glass to wall applications

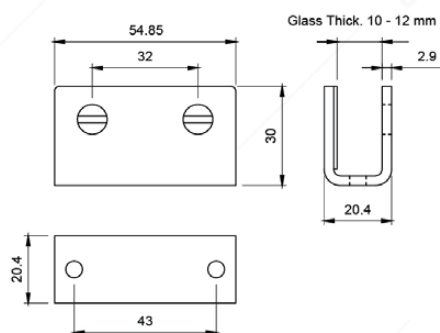

GLASS CLIP
GC 018 (GW) PSS
Glass to wall applications





GLASS CLIP
GC 018 (GG) PSS
Glass to glass applications





GLASS CLIP
GC 832 CP
Glass to glass applications



Available color :
GC 832 CP MATT BLACK



GLASS CLIP
GC 833 CP
Glass to wall applications




ADVERTISING FITTING

For Extra Convenience and Functionality

Aside of the essentials, Dekkson also provide miscellaneous products for various extra functionality. Advertising fitting, mohair, clip seal, and various types of sealant are available, so contractors can freely 'play' glass elements in their buildings.



ILLUSTRATIONS

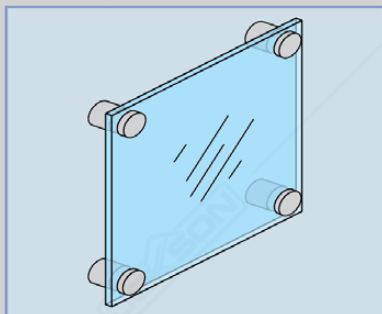

Wall Application

Material : Stainless Steel

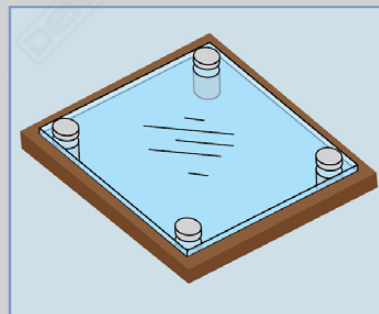



Table Application

Material : Stainless Steel




ADVERTISING FITTING ADV 8626 19x30MM SSS Glass to wall applications

Available :
19 X 40MM
19 X 50MM
19 X 60MM
19 X 70MM




ADVERTISING FITTING ADV 8626 25x40MM SSS Glass to wall applications

Available :
25 X 30MM
25 X 50MM
25 X 60MM
25 X 70MM



ADVERTISING FITTING ADV 8626 30x50MM SSS Glass to wall applications

Available :
30 X 30MM
30 X 50MM
30 X 60MM
30 X 70MM






ADVERTISING FITTING

ADV 19x30MM SSS
Glass to wall applications


Available :
19 X 40MM
19 X 50MM
19 X 60MM
19 X 70MM

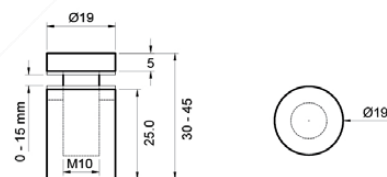

ADVERTISING FITTING

ADV 25x30MM SSS
Glass to wall applications


Available :
25 X 40MM
25 X 50MM
25 X 60MM
25 X 70MM

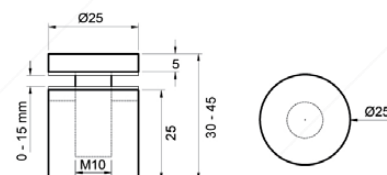

ADVERTISING FITTING

ADV 30x30MM SSS
Glass to wall applications


Available :
30 X 40MM
30 X 50MM
30 X 70MM

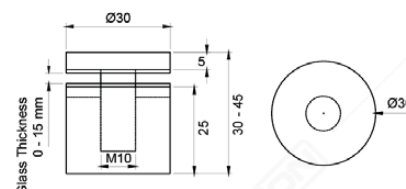

ADVERTISING FITTING

ADV G01 32x20MM SSS*
Glass to wall applications


Available :
32 X 10MM*
32 X 30MM*
32 X 40MM*
32 X 50MM*



ADVERTISING FITTING

ADV G03 32x30MM SSS*
Glass to wall applications

Available :
32 X 10MM*
32 X 20MM*
32 X 40MM*
32 X 50MM*
40 X 80MM*
40 X 100MM*

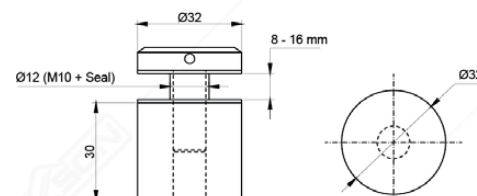


Material : Stainless Steel SUS 304



ADVERTISING FITTING

ADV 304 G001 ADJUST SSS
Glass to wall applications

Material : Stainless Steel SUS 304


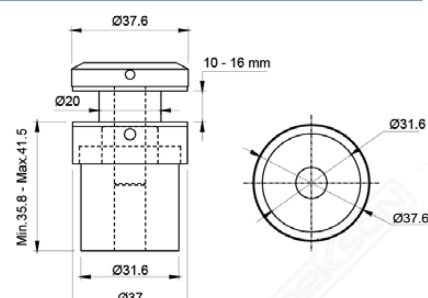


STAIRCASE RAILING



MATERIAL : STAINLESS STEEL SUS 304




SCG 01 DOUBLE SSS

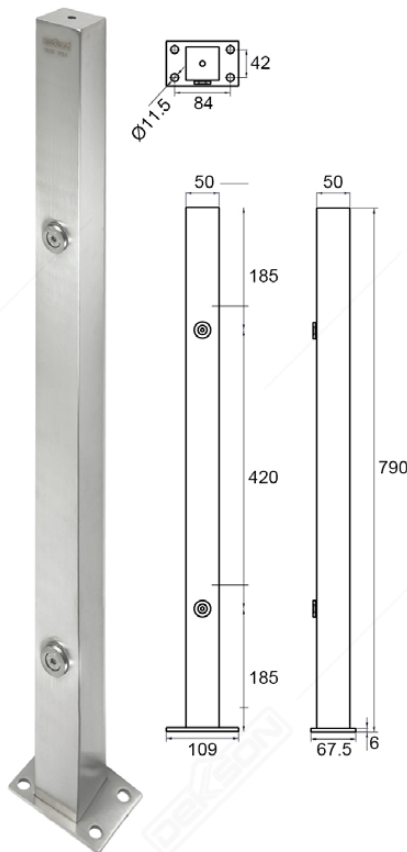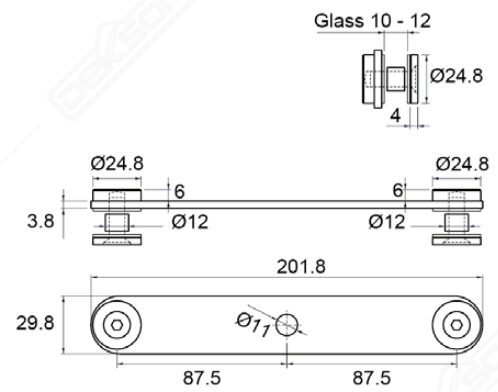

SCR 04 830 SSS

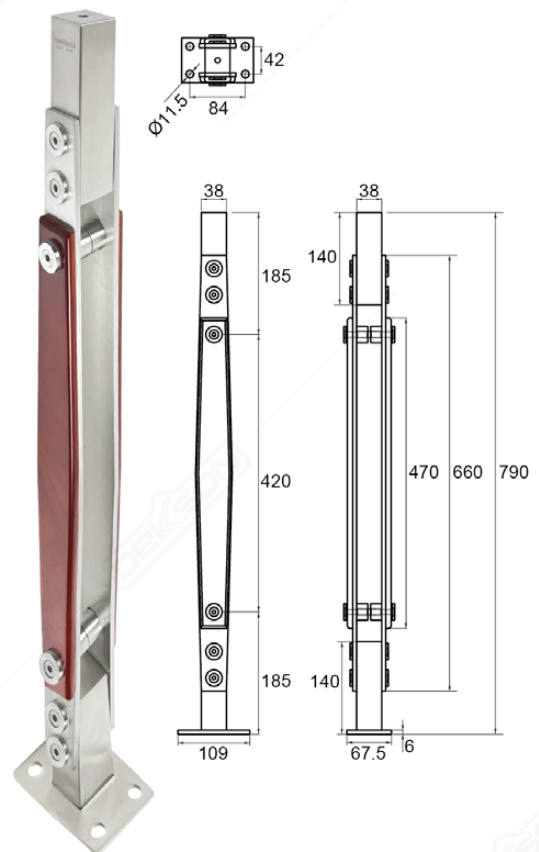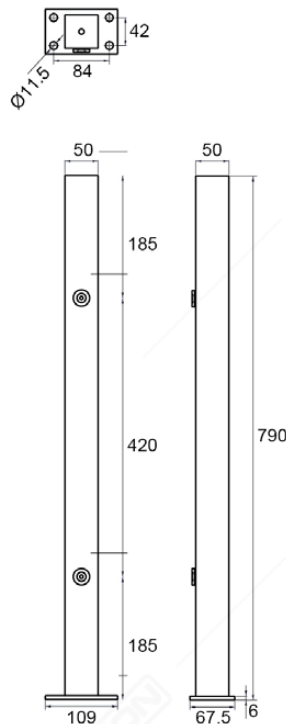


SCR 36 830 SSS+WOOD

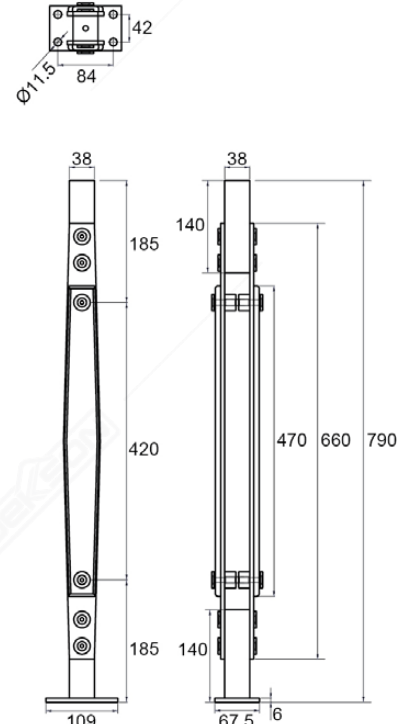





SCG 01 SINGLE SSS

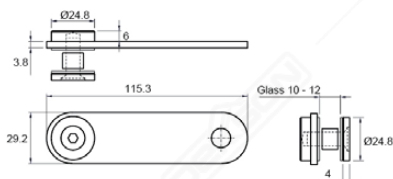


SCH 0312 RW STRAIGHT SSS
Available: SCH 0312 RW OVAL SSS




SCH 01 OVAL SSS

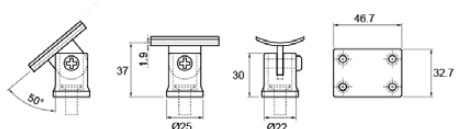


SCH 01 STRAIGHT SSS



GLASS HOLDER BANISTER
GH 14-01 OVAL SSS
Available: GH 14-01 STRAIGHT SSS

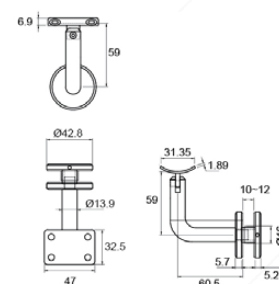


GC ST001 SSS
Available: GC ST001 MATT BLACK

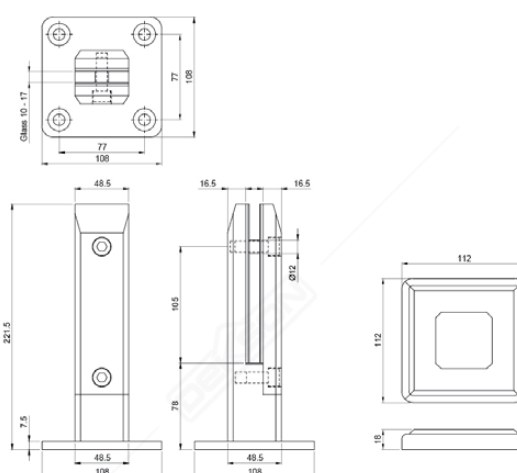





MOHAIR SIL
0.48X0.9X250M BLACK*




MOHAIR SIL
0.69X0.7X200M BLACK*



SMALL MOHAIR SIL
0.69X0.5X200M GREY
Available : BLACK




BIG MOHAIR SIL
1.1X0.7X175M BROWN
Available : BLACK, GREY



CLIP SEAL


CLIP SEAL MAGNETIC CS 100

10x2.2M (90/180) WH

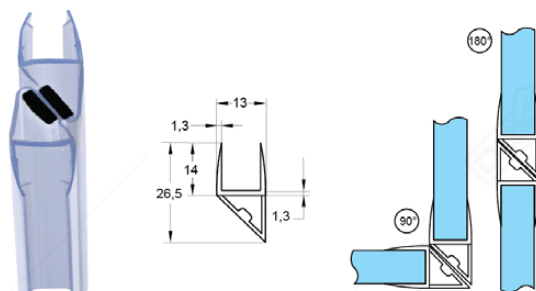


CLIP SEAL MAGNETIC CS 110

10x2.2M (135/180) WH

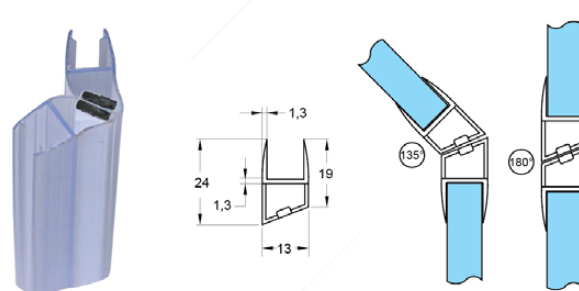


CLIP SEAL CS 8910

10x2.2M OVAL

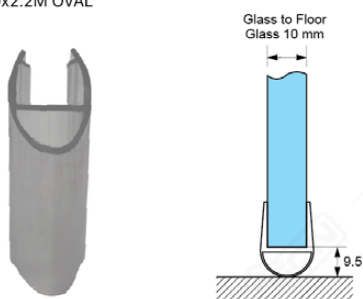


CLIP SEAL CS 8920


10x2.2M OVAL




CLIP SEAL CS BS 2.2M

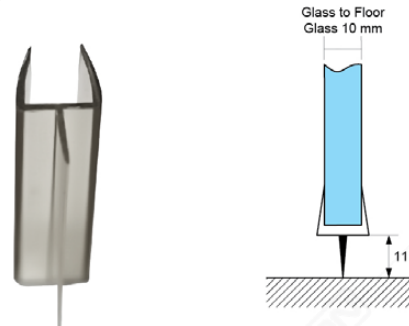

CLIP SEAL CS SS 2.2M



CLIP SEAL CS OW 2.2M



CLIP SEAL WITH BRUSH CSB 001


10x2.2M OVAL*

Available : 12x2.2M*




CLIP SEAL CS SS

(10/12MM) 2.5M*

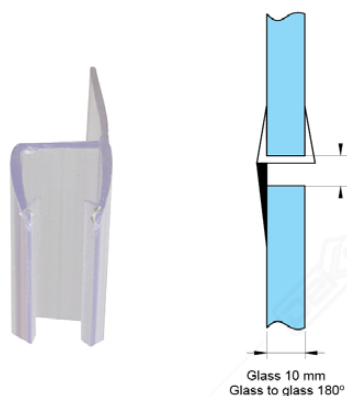

CLIP SEAL BS


(10/12MM) 2.5M*

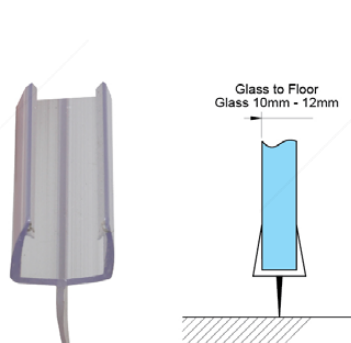


CLIP SEAL WITH BRUSH CSB 002


10x2.2M OVAL*

Available : 12x2.2M*
12x3M*

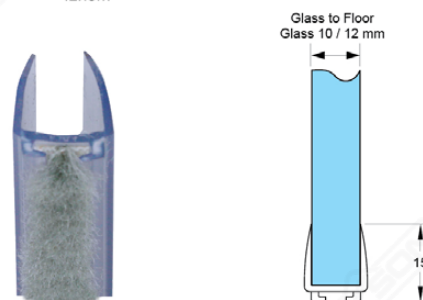




GSC 1S
Max Capacity : 75 kg

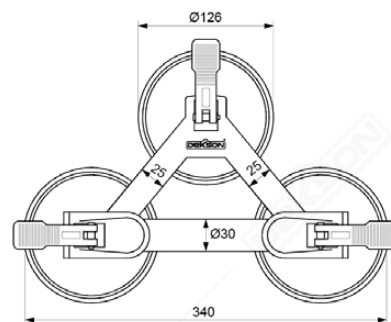

GSC 3S


ILLUSTRATIONS

VERTICAL

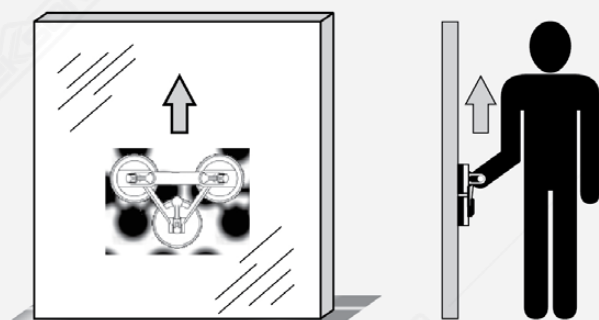

MAX CAPACITY : 150 KG

HORIZONTAL

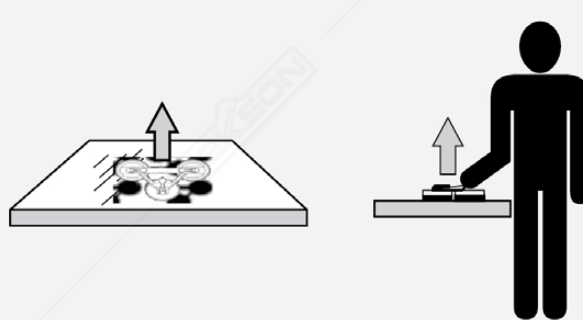

MAX CAPACITY : 130 KG

SILICONE SEALANT

Every great finish starts with a reliable seal. Dekkson Silicon Sealant offers superior adhesion, excellent elasticity, and long-term protection against water and weather damage. Perfect for both interior and exterior use, it delivers a neat, professional result for every project.

SILICONE

DEKKSON NEUTRAL SILICONE SEALANT

DESCRIPTION :

Dekkson Neutral Silicone Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

APPLICATIONS :

General Glazing : Masonry, Concrete, Ceramics, Stone, Glass, Aluminium, Most Plastic, Wood, Brick, Zincalume, Galvanized Iron.

General Sealing : Containers, Automobiles, Rain Water Goods, Roofing, Joints in Building and Civil Engineering.


DIY Applications : Gutter, Air-Conditioning, Sanitary, Car, Boat and Other Marine Industry uses.

Electronics Sealing : As Sealants in The Electrical and Electronics Industry.


SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: 1.03 ± 0.05
Shore A Hardness	: 24 Approx.
Elongation	: 400% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: Within 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -50°C to 150°C
Self Life	: 12 Months
Netto	: 300 ml

Color : NA, BK, DB, Light Grey, White
 * Joint Size Minimum 3 mm x 3 mm
 * Joint Size Maximum 30 mm




Concrete




Ceramics



Stone



Glass



Aluminium



Zincalume



Wood



Brick

DEKKSON EXTENDED SILICONE SEALANT

DESCRIPTION :

Dekkson Extended Sealant is one part sealant that offer excellent adhesion, weatherability and elasticity for general glazing and for sealing application.

APPLICATIONS :

General Glazing : Glass, Plastic, Channel or Stop.

Curtain Wall Sealing : Glass, Steel, Granite, and Plastic.

General Sealing : Sheet Metal, Skylights, Ventilators, Air-Conditioning

SPECIFICATION :

Curing System	: Acetoxy
Appearance	: Non-Sagging Paste
Odour	: Vinegar Smell
Specific Gravity	: 0.96 ± 0.05
Shore A Hardness	: 18 to 26 Approx.
Elongation	: 300% Approx.
Tensile Strength	: 1.4 MPa Approx.
Tack free Time	: 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -40°C to 100°C
Self Life	: 12 Months
Netto	: 300 ml


Color : NA, BK, BA, WH, Light Grey
 * Joint Size Minimum 3 mm x 3 mm
 * Joint Size Maximum 30 mm




Plastic



Granite



Sheet Metal



Ventilators



Air-Conditioning



Channel or Stop



Glass



Skylights





SILICONE DKS 8793 ST (STRUCTURAL)

DESCRIPTION :

DKS-8793 ST SILICONE is a high performance, 100% neutral silicone architectural grade silicone rubber, designed specifically for structural bonding and protective glazing applications.

APPLICATIONS :

Structural bonding and glazing of curtain wall.

SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: Clear 1.00 g/cm ³ and Coloured 1.37 g/cm ³
Shore A Hardness	: 48 Approx.
Elongation	: 200% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: 30 Minutes
Application Temp.	: -4°C to 40°C
Service Temp.	: -27°C
Self Life	: 12 Months
Netto	: 300 ml

Color : Clear, Black, D. Brown, White, Light Grey
 * Joint Size Minimum 3 mm x 3 mm
 * Joint Size Maximum 30 mm



Structural



Curtain Wall



ACP



Aluminium Window



Spider Fitting



Concrete



Brick



Skylights



CONSTRUCTION ADHESIVE


DESCRIPTION :

is a versatile general purpose construction adhesive suitable for bonding a wide variety of building materials for internal and external applications.


SPECIFICATION :

Appearance	: Thixotropic paste like consistency
Solids Content	: Approx. 75%
Open Time (Reposition)	: 10 to 30 minutes depending on temperature and method of application
Sag Resistance (AS2329-1999)	: < 4mm
Specific Gravity	: 1.12±0.02
Maximum Bond Strength	: Generally between 48 to 72 hours depending on application.
Shear Bond Strength (AS2329-1999)	: >2.6Mpa (after 24 hours)
VOC	: 310g/L
Netto	: 300ml


Color : White
 * Joint Size Minimum 3 mm x 3 mm
 * Joint Size Maximum 30 mm



Frame



PVC




Wallpaper



Glass



Mirror



Metal



Wood



Brick

SILICONE SAUSAGE



SILICONE DKS SAUSAGE NEUTRAL 8610

Available : WHITE, BLACK, DARK BROWN, BROWN, LIGHT GREY
Netto : 600 ml

SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: 1.03 ± 0.05
Shore A Hardness	: 24 Approx.
Elongation	: 400% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: Within 15 Minutes
Application Temp.	: -20°C to 50°C
Service Temp.	: -50°C to 150°C
Self Life	: 12 Months
Netto	: 300 ml

Color : NA, BK, DB, Light Grey, White
* Joint Size Minimum 3 mm x 3 mm
* Joint Size Maximum 30 mm



SILICONE DKS 8793 ST

Available : WHITE, BLACK, DARK BROWN, BROWN, LIGHT GREY
Netto : 600 ml

SPECIFICATION :

Curing System	: Neutral (Oxime)
Appearance	: Non-Sagging Paste
Odour	: Low Oxime Smell
Specific Gravity	: Clear 1.00 g/cm^3 and Coloured 1.37 g/cm^3
Shore A Hardness	: 48 Approx.
Elongation	: 200% Approx.
Tensile Strength	: 1.20 MPa Approx.
Tack free Time	: 30 Minutes
Application Temp.	: -4°C to 40°C
Service Temp.	: -27°C
Self Life	: 12 Months
Netto	: 300 ml

Color : Clear, Black, D. Brown, White, Light Grey
* Joint Size Minimum 3 mm x 3 mm
* Joint Size Maximum 30 mm



SILICONE GUN



SILICONE GUN 8600

For Silicone Sausage Pack Only



SILICONE GUN 8200

For Silicone Cartridge Tube Pack Only



AVAILABLE AT :

